123027

FR35G/0

Single tank 8l gas fryer with in-tank heat exchangers - baskets and lids included

- Gas fryer (35 cm, 8 l top version).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- AISI 304 deep drawn tank with rounded corners seamlessly welded to an AISI 304 deep drawn worktop, Scotch Brite finish.
- Worktop with front area for oil and foam expansion.
- Rounded internal profile of the tank to facilitate cleaning, complying with hygiene standards.
- Piezoelectric ignition.
- Pilot burner and safety thermocouple.
- AISI 304 stainless steel round heat exchangers in the tank.
- Operating thermostatic valve with 7 adjustment levels. The valve's excellent reactivity prevents the oil temperature from dropping, ensuring a dry and crispy product on the outside and soft on the inside.
- Max. Temperature 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- Front drain with elbow extension included.
- Basket support on flue.
- Lid and basket included for each tank.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

TECHNICAL DATA

TOTAL POWER	6,25 kW	GAS POWER	6,25 kW
TANK CAPACITY	8LT	NATURAL GAS CONSUMPTION	0,66 m³/h
TANK DIMENSIONS	22,5X34X22,5 cm	HEATING	HEAT EXCHANGERS IN THE TANK
TANK TYPE	AISI 304	TANKS	n° 1
CE GAS CERTIFICATE NUMBER	CE-0085BO0095	GAS CONNECTION DIAMETER	1/2"G EN10226-1
FOOT HEIGHT	25 mm	FOOT ADJUSTMENT	25/35 mm
WIDTH	35 cm	DEPTH	65 cm
HEIGHT	28 cm	PACKAGE WIDTH	71 cm
PACKAGE DEPTH	41 cm	PACKAGE HEIGHT	53 cm
NET WEIGHT	19 kg	GROSS WEIGHT	24 kg
VOLUME	0,15 m³		

ACCESSORIES

120575	EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
120585	JOINT FOR TECNO60, TECNO65
120690	2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

INSTALLATION DIAGRAMS

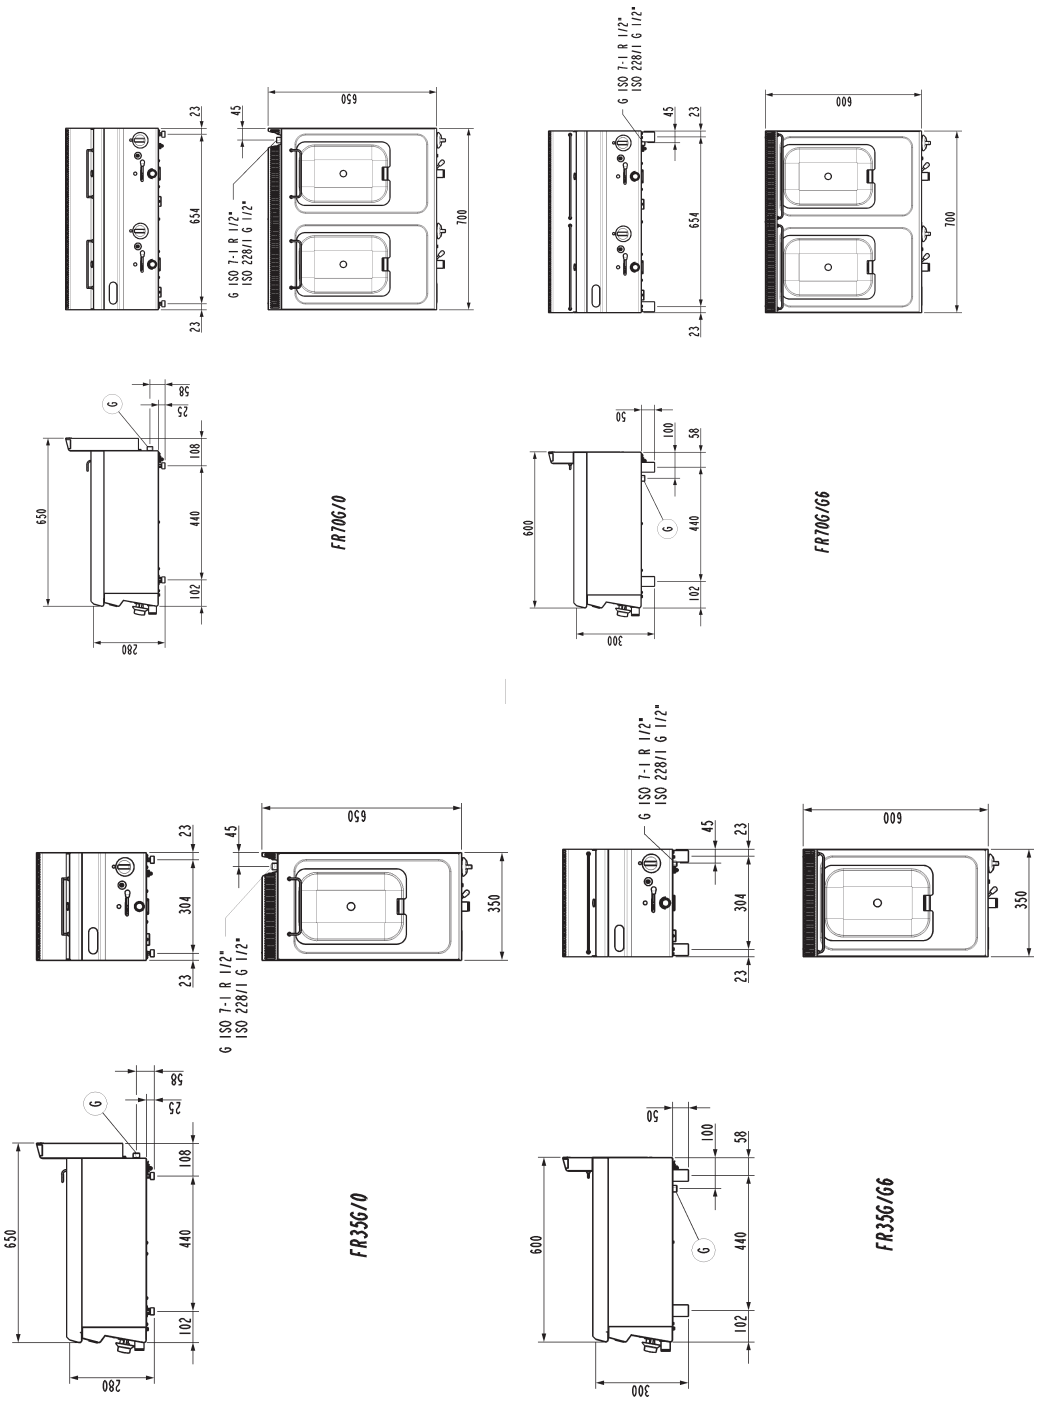

G (½"ISO228-1 – G ½" EN 10226-1) = Attacco gas | Gas inlet connection | Gasanschluss | Подсоединение газ | Arrivйe gaz | Entrada gas.

Fig.1 | Abb.1 | рис.1 - 5415.682.00

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it