
126035

FR70E/0**Single tank 8+8l electric fryer with
in-tank tilting heating elements -
baskets and lids included**

- Electric fryer (8+8 l, 70 cm top version) with 2 independent tanks.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- AISI 304 deep drawn tank with rounded corners seamlessly welded to an AISI 304 deep drawn worktop, Scotch Brite finish.
- Worktop with front area for oil and foam expansion.
- Rounded internal profile of the tank to facilitate cleaning, complying with hygiene standards.
- Heating through AISI 304 stainless steel tilting armoured heating elements for easy cleaning of the tank.
- Operating thermostat ranging between 100°C and 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- A safety thermostat triggers in case of abnormal operation.
- Basket support fixed to the tilting device.
- Front drain with elbow extension included.
- Lid and basket included for each tank.
- Technical compartment to facilitate connection to the electrical network.
- Height-adjustable rubberised plastic feet (15-25 mm)


TECHNICAL DATA

TOTAL POWER	12 kW	ELECTRIC POWER	12 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TEMPERATURE RANGE	100÷190 °C	TANK CAPACITY	8LT+8LT
TANK DIMENSIONS	22,5X34X22,5 cm	HEATING	HEATING ELEMENTS IN THE TANK
TANK TYPE	AISI 304	TANKS	n° 2
FOOT HEIGHT	25 mm	FOOT ADJUSTMENT	25/35 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	65 cm	HEIGHT	28 cm
PACKAGE WIDTH	76 cm	PACKAGE DEPTH	71 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	29,5 kg
GROSS WEIGHT	36 kg	VOLUME	0,29 m³

ACCESSORIES

120575	EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
120585	JOINT FOR TECNO60, TECNO65
120690	2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)

INSTALLATION DIAGRAMS

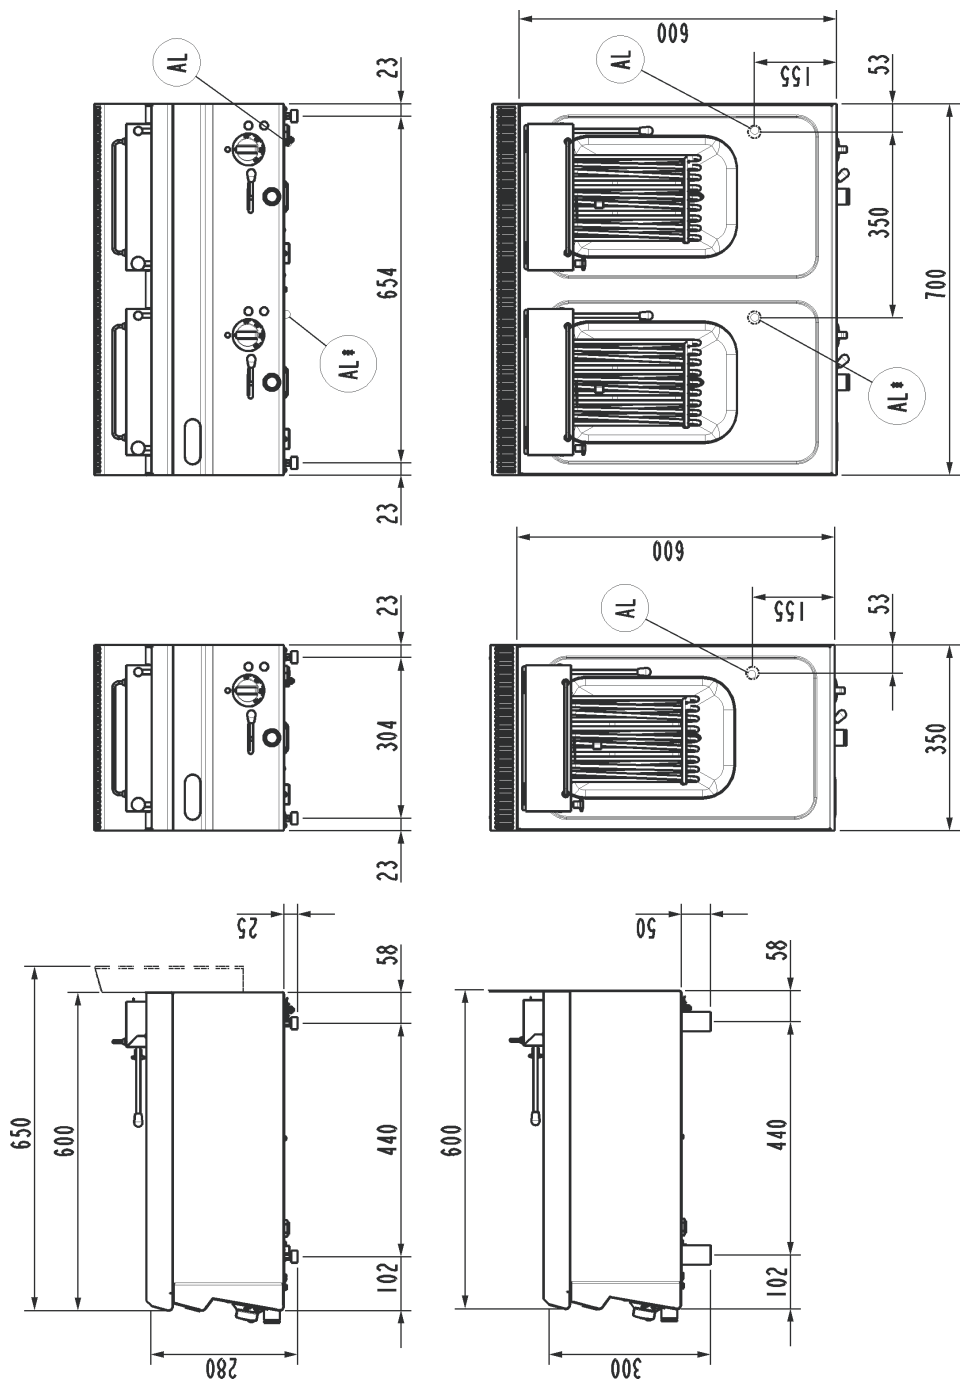

Al = Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrée cable électrique | Entrada cable de alimentación.
Al* = Entrata 2° cavo elettrico | 2nd Power supply cable inlet | 2° Netzkabeleingang | 2° Вход электропровода | Entrée 2° cable électrique | Entrada 2° cable de alimentación.

Fig.1 | Abb.1 | рис.1 - 5415.681.00