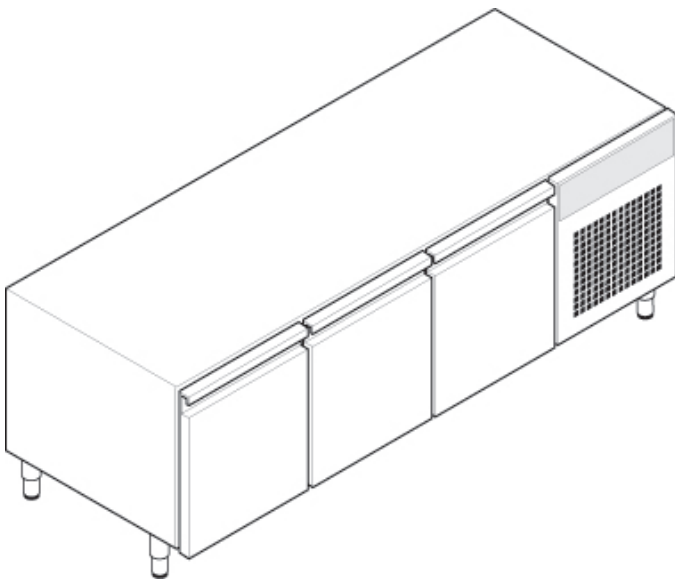

126069

BP175N/0**Tecno70 refrigerated base (GN1/1)
- 3 doors with R290 gas - cm
175x65x62h**

- Refrigerated base GN1/1, temperature range -2/+8°C, with 3 doors and an integrated motor on the right-hand side (external dimensions 175 x 65 x 62H cm).
- 1 GN 1/1 grid included per door.
- Internal construction made with AISI 304 stainless steel.
- External construction: AISI 304 doors, drawers, side panels, worktop. AISI 430 stainless steel back panel.
- R290 refrigerant with low global warming potential (GWP), making the appliances eco-friendly.
- Ventilated refrigeration for an even temperature inside the base unit.
- Digital control panel.
- 50 mm thick insulation made with HCFC-free polyurethane resins.
- Automatic defrosting via electric heaters.
- Automatic condensation water disposal device.
- Easily replaceable magnetic gaskets for excellent sealing.
- AISI 304 stainless steel height-adjustable feet.

TECHNICAL DATA


TOTAL POWER	0,318 kW	ELECTRIC POWER	0,318 kW
FREQUENCY	50 Hz	VOLTAGE	230 ~ V
TEMPERATURE RANGE	-2÷8 °C	REFRIGERATOR POWER	378 kCal/h
GROSS CELL CAPACITY	195 lt	DRAWERS	n° 0
DOORS	n° 3	DOORS / DRAWERS	n° 3 / 0
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	3	WIDTH	175 cm
DEPTH	65 cm	HEIGHT	62 cm
PACKAGE WIDTH	185,0 cm	PACKAGE DEPTH	74,0 cm
PACKAGE HEIGHT	80,0 cm	NET WEIGHT	108,0000 kg
GROSS WEIGHT	128,0000 kg	VOLUME	1,09 m³

ACCESSORIES

9023	GN1/1 GRID FOR REFRIGERATED BASES
------	-----------------------------------

INSTALLATION DIAGRAMS


BC/BP/BPC120(140)

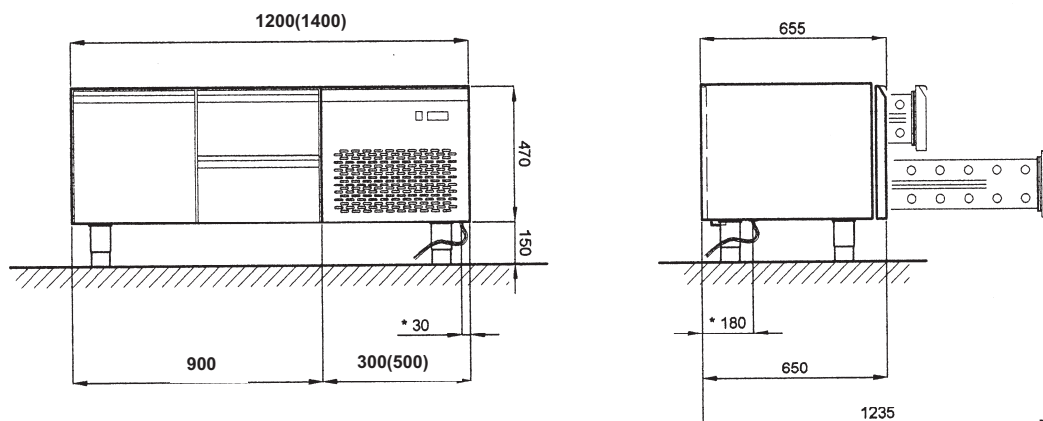

ALIMENTAZIONE : 230 V ~ 1 - 50Hz (* spina SHUKO) - Lunghezza cavo 1.5 mt
 POTENZA MAX ASSORBITA : 350 W

GAS : R 134 a

BC/BP/BPC160(175)

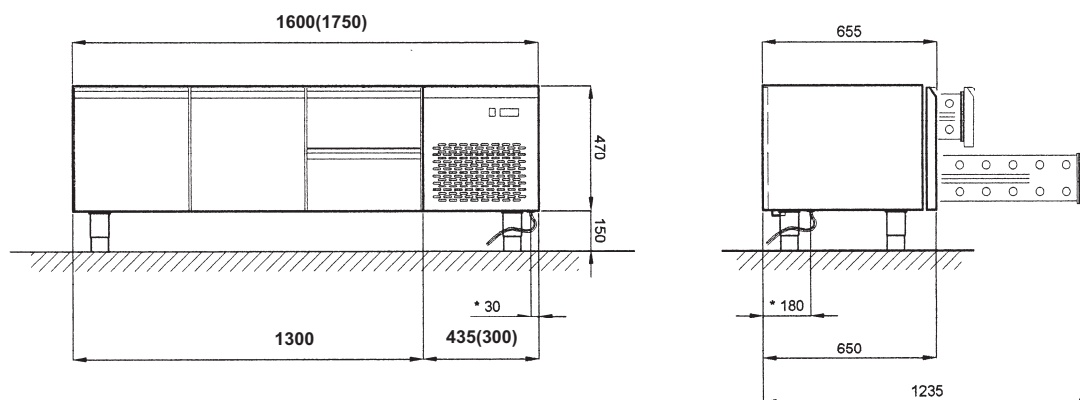

ALIMENTAZIONE : 230 V ~ 1 - 50Hz (* spina SHUKO) - Lunghezza cavo 1.5 mt
 POTENZA MAX ASSORBITA : 385 W

GAS : R 134 a

Fig.1 | Abb.1 | рис.1 - 5415.692.00