


136031

DFR70E0

Double tank 8+8l electric fryer , in-tank tilting heating elements - basket and lids included (Drop-in version)

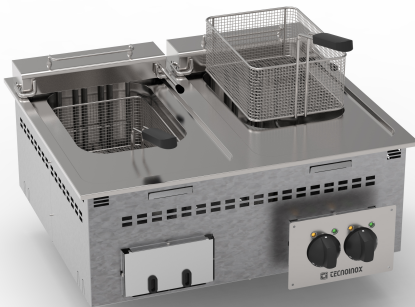

- Electric drop-in fryer with 2 x 8+8 l independent tanks (70 x 60 x 33 cm).
- Drop-ins are appliances inserted into worktops of different non-flammable materials. Modules can rest on the worktop or be installed flush the worktop.
- Power: 2 x 6 kW.
- AISI 304 deep drawn tank with rounded corners seamlessly welded to an AISI 304 stainless steel deep drawn worktop, Scotch Brite finish.
- Rounded internal profile of the deep drawn tank to facilitate cleaning, complying with hygiene standards.
- Large front basin for oil and foam expansion.
- Heating through AISI 304 stainless steel tilting armoured heating elements for easy cleaning of the tank.
- Basket support fixed to the tilting device.
- Draining on the tank bottom.
- Basket and lid included.
- Stainless steel control panel.
- Operating thermostat ranging between 100°C and 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- A safety thermostat triggers in case of abnormal operation.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.


TECHNICAL DATA

TOTAL POWER	12 kW	ELECTRIC POWER	12 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TEMPERATURE RANGE	100÷190 °C	TANK CAPACITY	8LT+8LT
TANK DIMENSIONS	22,5X34X22,5 cm	HEATING	HEATING ELEMENTS IN THE TANK
TANK TYPE	AISI 304	TANKS	n° 2
WIDTH	70 cm	DEPTH	60 cm
HEIGHT	33 cm	PACKAGE WIDTH	76 cm
PACKAGE DEPTH	72 cm	PACKAGE HEIGHT	55 cm
NET WEIGHT	24 kg	GROSS WEIGHT	31,6 kg
VOLUME	0,3 m³		





ACCESSORIES

120575	EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
120690	2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)

INSTALLATION DIAGRAMS


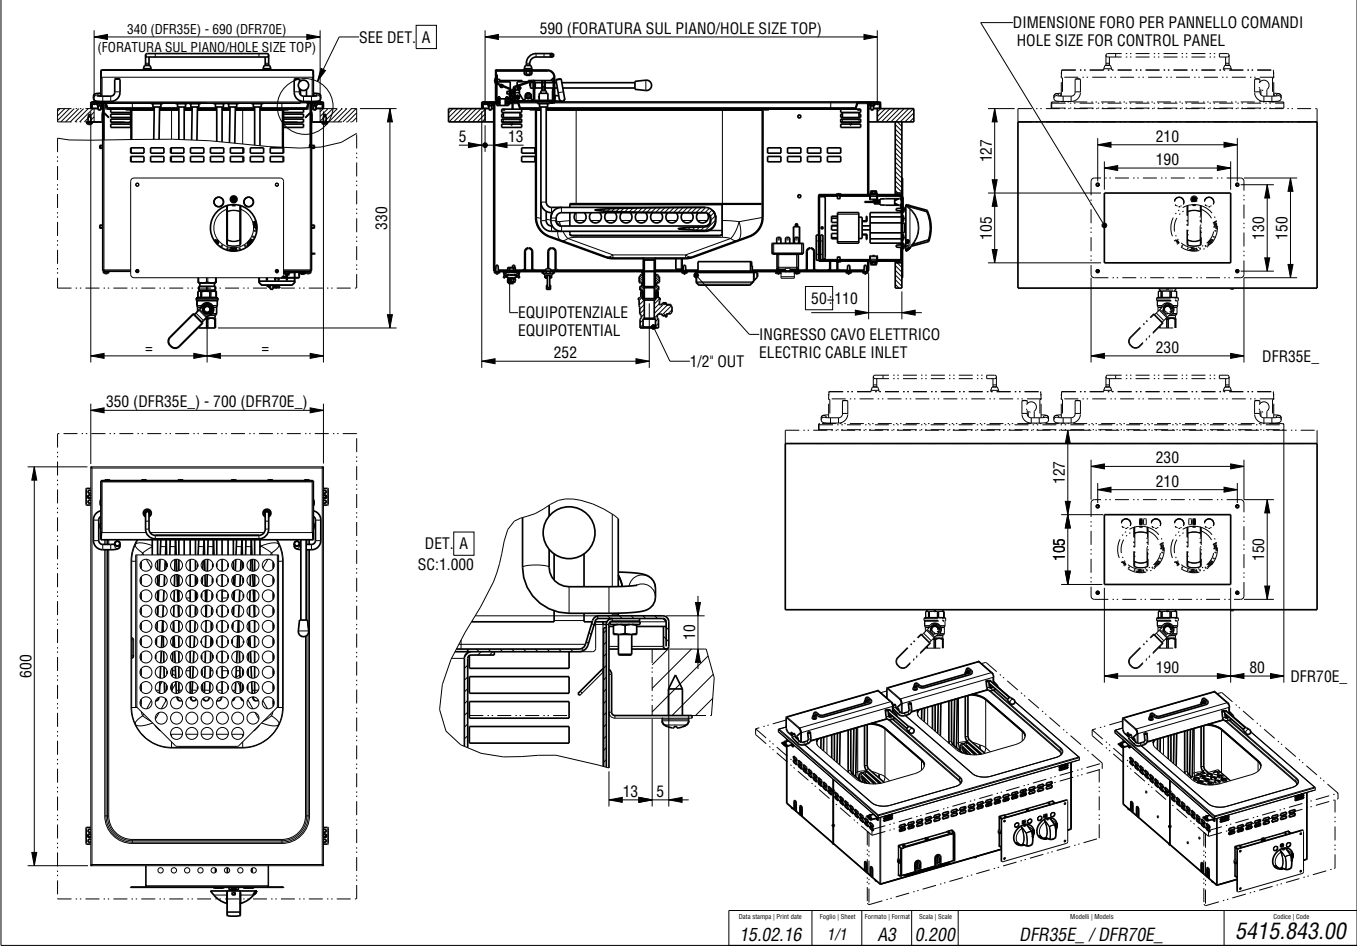


Standard installation

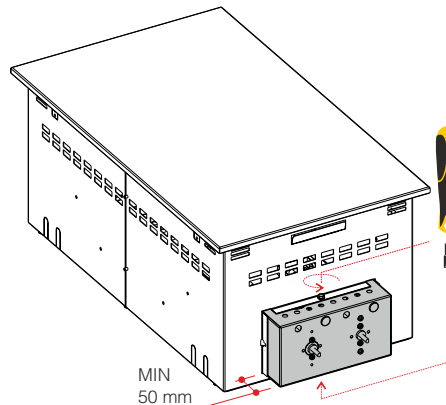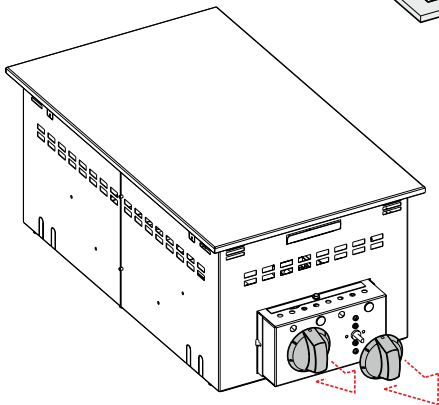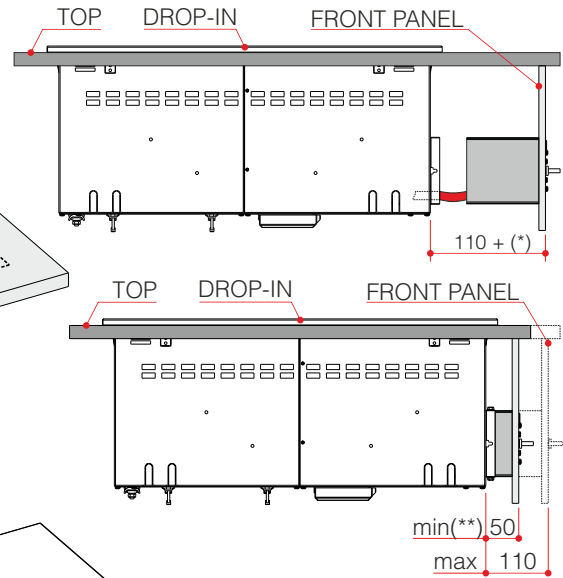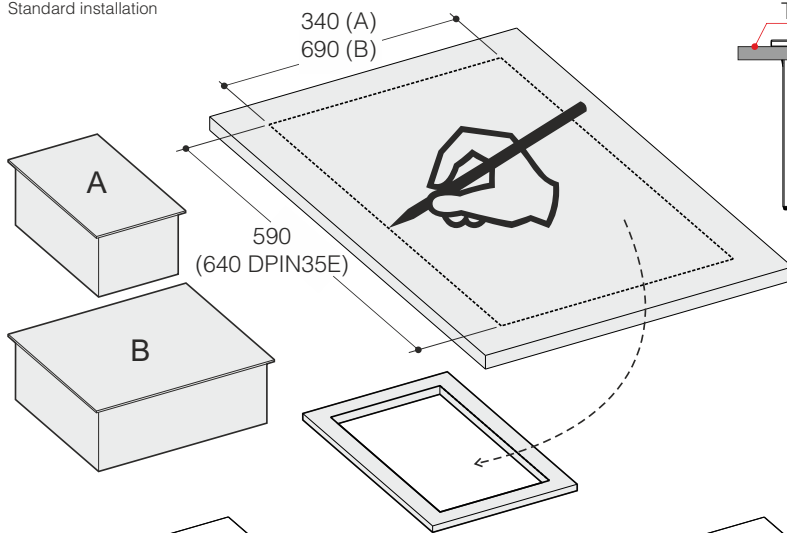


(*) dipende dal modello
variable from models


(**) 110 mm
per modelli DBM_
for DBM_ models

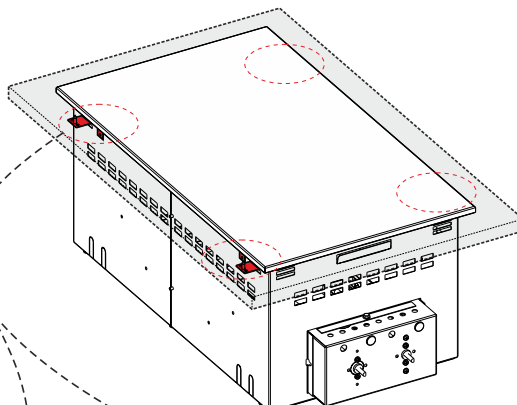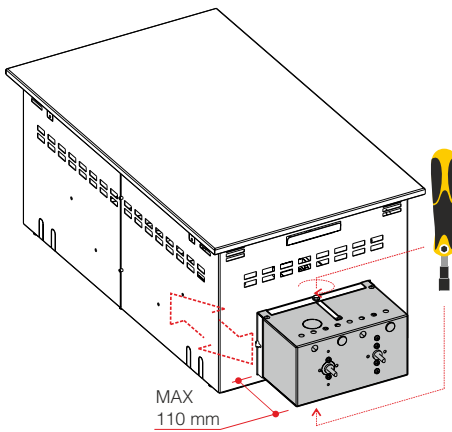


SOLUTION 1




SOLUTION 2




SOLUTION 3 (only DL_ & DCP_)



Fixing Type 1

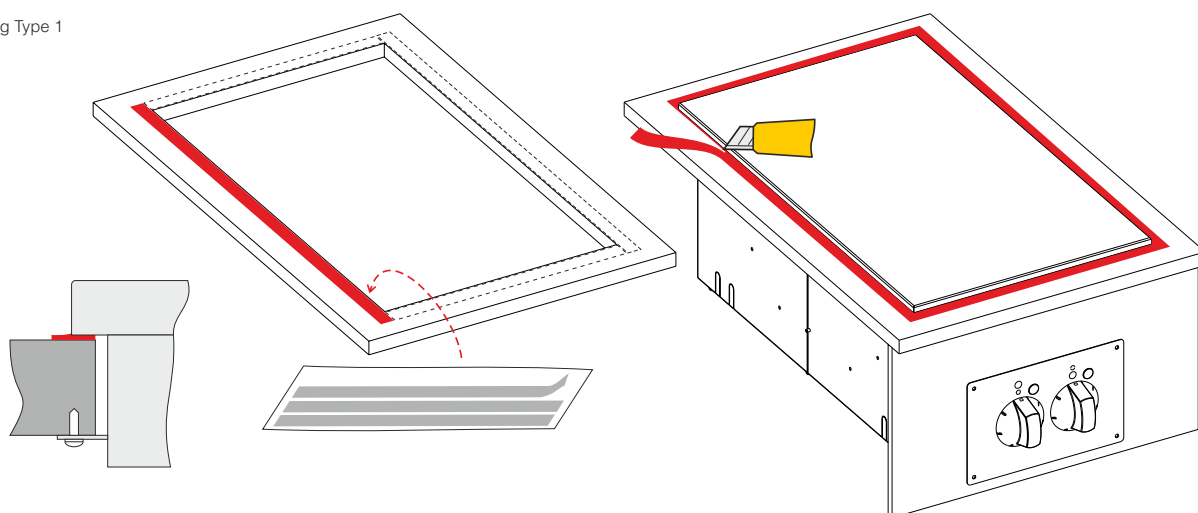

Fixing Type 2 & 3

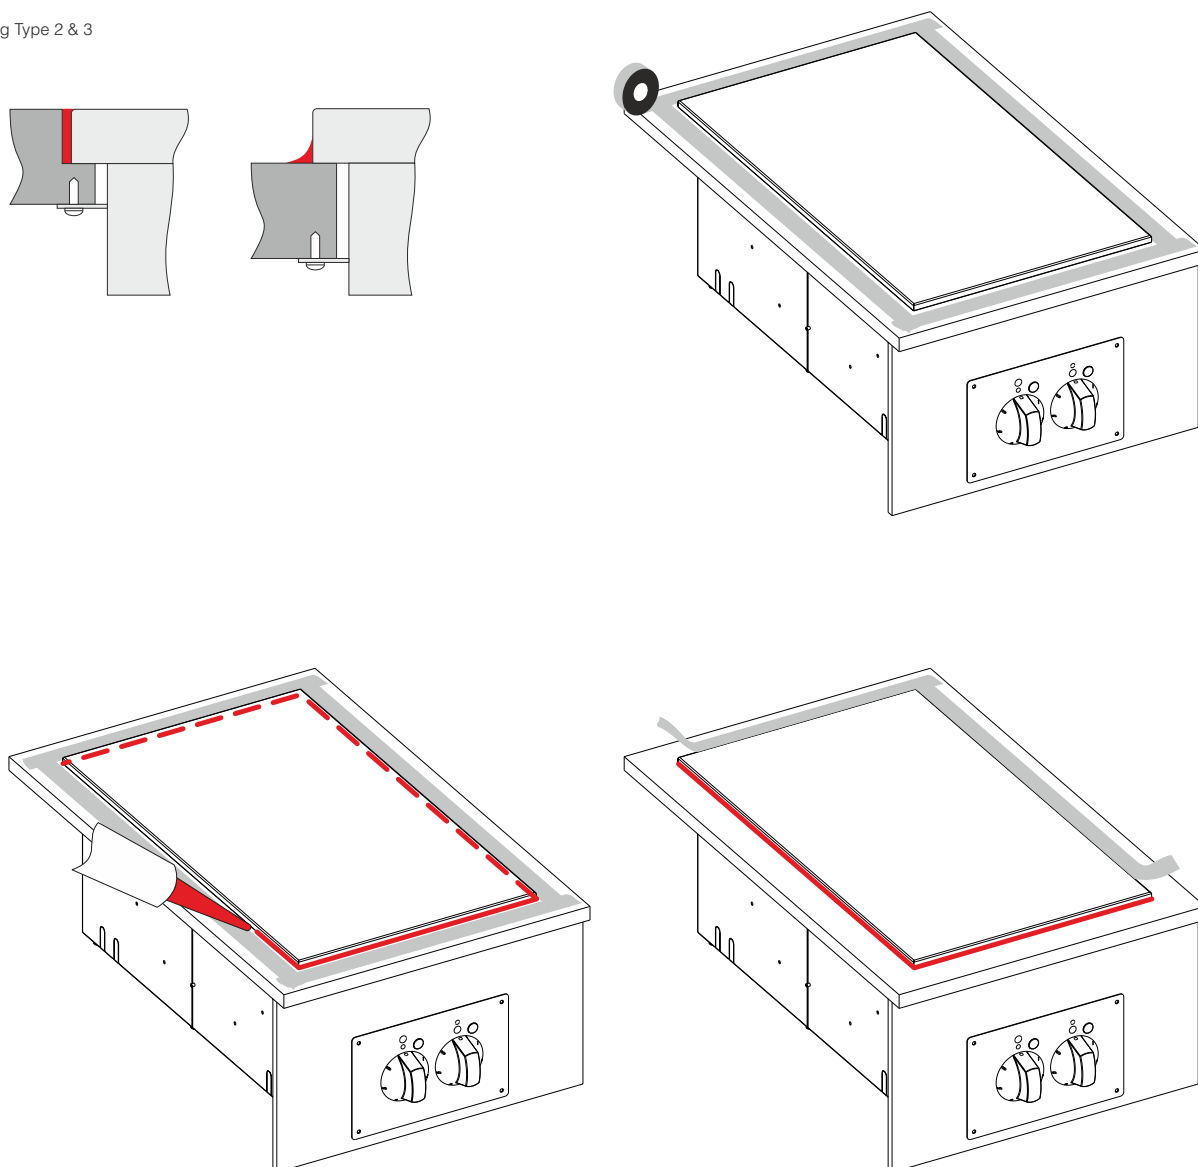

Side installation

