


**313275****PFH8HPGG9**

## 4-burner hermetic gas boiling top High Power with cast iron grids on GN2/1 gas static oven with 1 grid

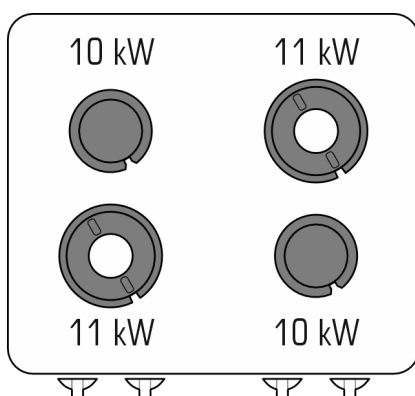

- 4-burner gas cooker on a GN 2/1 gas static oven (80 cm), HIGH POWER version.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring (10kW) and double ring (11kW).
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

### >> GN 2/1 GAS STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Equipped with thermostatic valve, 150-290°C adjustment.

>> Pilot burner ignition with a thermocouple through a piezoelectric device.

>> Removable stainless steel side tray racks.

>> 1 grid included.

- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

|                         |                  |                                 |                          |
|-------------------------|------------------|---------------------------------|--------------------------|
| TOTAL POWER             | 49 kW            | GAS POWER                       | 49 kW                    |
| OVEN POWER              | 7 kW             | OPEN BURNER POWER               | 10X2 + 11X2 n°- kW       |
| BOILING TOP POWER       | 42 kW            | TRAY CAPACITY                   | n° 4XGN2/1               |
| NATURAL GAS CONSUMPTION | 5,19 m³/h        | COOKING CHAMBER DIMENSIONS      | 57,5X65X30 cm            |
| OVEN DIMENSIONS         | GN2/1            | GUIDES                          | n° 4                     |
| NUMBER OF BURNERS       | n° 4             | VERTICAL DISTANCE BETWEEN TRAYS | 6 cm                     |
| OVEN TEMPERATURE RANGE  | 150÷290 °C       | BOILING PAN SUPPORT             | RAAF ENAMELLED CAST IRON |
| OVEN TYPE               | STATIC           | CE GAS CERTIFICATE NUMBER       | CE-0085BQ0326            |
| GAS CONNECTION DIAMETER | 3/4" G EN10226-1 | FOOT HEIGHT                     | 133 mm                   |
| FOOT ADJUSTMENT         | 133/195 mm       | WIDTH                           | 80 cm                    |
| DEPTH                   | 90 cm            | HEIGHT                          | 90 cm                    |
| PACKAGE WIDTH           | 86,0 cm          | PACKAGE DEPTH                   | 100,0 cm                 |
| PACKAGE HEIGHT          | 113,0 cm         | NET WEIGHT                      | 128,5 kg                 |
| GROSS WEIGHT            | 150,5 kg         | VOLUME                          | 0,97 m³                  |

ACCESSORIES

|        |                                                          |
|--------|----------------------------------------------------------|
| 220590 | EXTRA OVEN GRID GN2/1 (53X63CM)                          |
| 319010 | REAR COVERING PANEL FOR CABINET (L=80CM)                 |
| 319067 | 10KW HERMETIC FLAME SPREADER                             |
| 399530 | SIDE COVERING PANEL FOR A 1-MODULE CABINET               |
| 399538 | PAN SUPPORT REDUCER                                      |
| 399569 | ADJUSTABLE WATER TAP FOR KITCHENS WITH A FLUE            |
| 399573 | PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM) |

## INSTALLATION DIAGRAMS

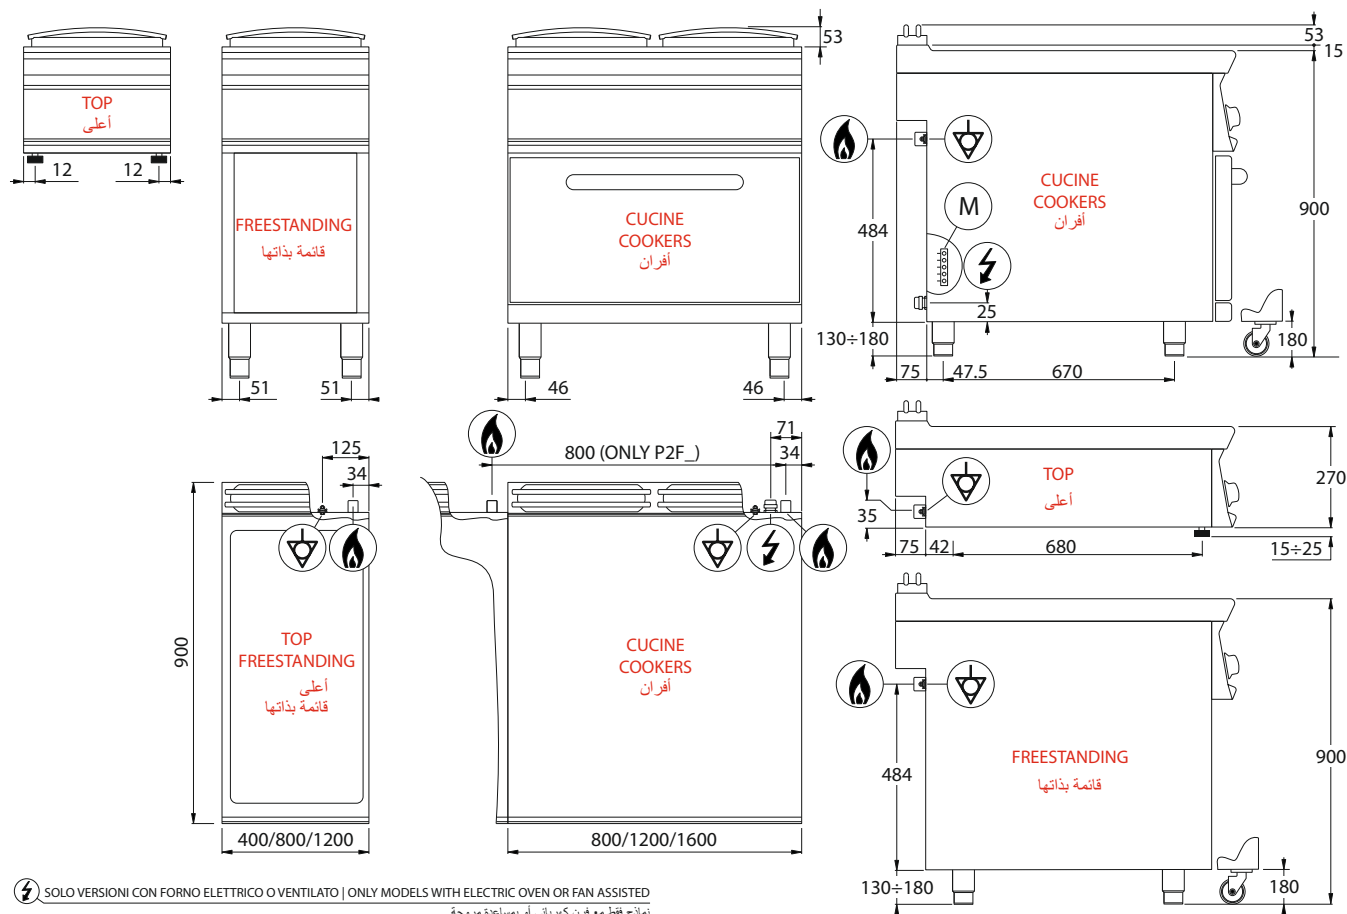


Fig.1 | Abb.1 | рис.1 | م.الصورة رقي ١ - 5415.618.00