


316225**PIN4FE9N****2-zone freestanding induction
boiling top on open cabinet**

- Freestanding induction boiling top (40 cm) with 2 independent cooking zones on an open cabinet.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other boiling top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction cookware with a base diameter ranging between 12 cm and 32 cm.
- Setup for installing a water tap.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.

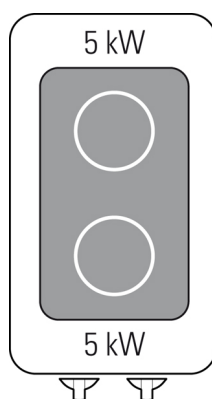

TECHNICAL DATA

TOTAL POWER	10 kW	ELECTRIC POWER	10 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	2X5 n°- kW	CABINET DIMENSIONS	33X76,1X39,5 cm
NUMBER OF COOKING ZONES	n° 2	FOOT HEIGHT	133 mm
FOOT ADJUSTMENT	133/195 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	90 cm
HEIGHT	90 cm	PACKAGE WIDTH	100 cm
PACKAGE DEPTH	46 cm	PACKAGE HEIGHT	115 cm
NET WEIGHT	42,6 kg	GROSS WEIGHT	57,6 kg
VOLUME	0,53 m³		

ACCESSORIES

319002	STAINLESS STEEL RIGHT/LEFT DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
319009	REAR COVERING PANEL FOR CABINET (L=40CM)
399530	SIDE COVERING PANEL FOR A 1-MODULE CABINET
399569	ADJUSTABLE WATER TAP FOR KITCHENS WITH A FLUE
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION DIAGRAMS

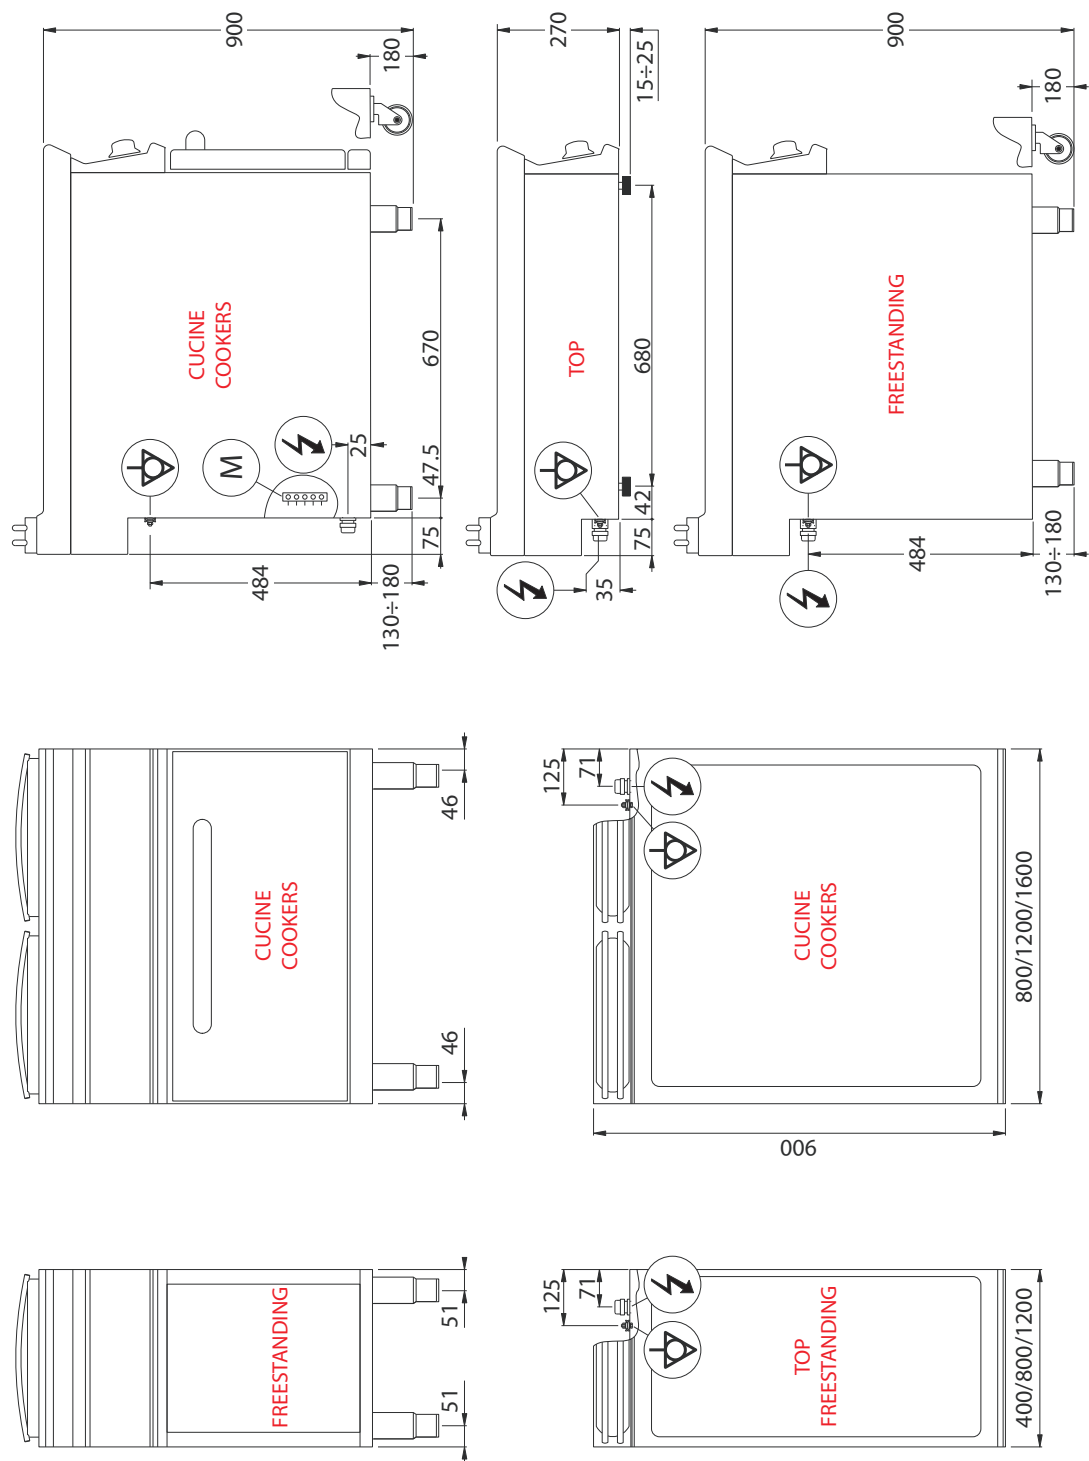


Fig.1 | Abb.1 | рис.1 - 5415.561.00