316231

GD4FE9N

Freestanding electric contact Grill with water on open cabinet

- Freestanding electric water grill with direct cooking on heating elements on a 40 cm open cabinet.
- Power: 5.4 kW.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- AISI 304 stainless steel tank hermetically welded to the AISI 304 stainless steel top with Scotch Brite finish to facilitate cleaning and increase safety in use by eliminating liquid leakage.
- Tilting armoured heating elements with an oval profile for direct cooking. They are made of AISI 304L stainless steel with low carbon content to ensure excellent resistance to corrosion. Moreover, they comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- Safety microswitch in case of lifted heating elements.
- Automatic water filling with solenoid valve and reducer with a 0.1 l/min capacity.
- Water drain in the centre of the tank with 1 ½ inch pipe. Regulation of the water level in the tank through a removable and washable overflow.
- Equipped with a wire mesh filter, the overflow prevents larger food residues from obstructing the drain and makes it easier to clean the tank.
- Operating thermostat with automatic reset serving as an empty tank safety device.
- Red light on the control panel indicating empty tank.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.
- Energy regulator 0-6-INFINITE which simultaneously activates the heating element and tank water filling. Maximum temperature 300°C.
- Removable splashback on 3 sides included.
- A stainless steel scraper shaped is included as per standard. It is shaped as the heating element profile to facilitate cleaning, and it can also be used to lift the heating element unit.
- Plastic elbow fitting for rear draining, designed for high-temperature use, included.
- The electric components, such as solenoid valves and contactors, are positioned near the control panel to facilitate maintenance.
- Technical compartment for easy connection to the electrical network.

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

TECHNICAL DATA

TOTAL POWER	5,4 kW	ELECTRIC POWER	5,4 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
COOKING SURFACE	27,6X64 cm	HEATING ZONES	n° 1
WATER CONNECTION POSITION	63,9CM	WATER DRAIN POSITION	65,2CM
WATER CONNECTION DIAMETER	3/4"	DRAIN DIAMETER	1" 1/2
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	90 cm	HEIGHT	90 cm
PACKAGE WIDTH	101 cm	PACKAGE DEPTH	46,0 cm
PACKAGE HEIGHT	115,0 cm	NET WEIGHT	53,5 kg
GROSS WEIGHT	61 kg	VOLUME	0,54 m³

ACCESSORIES

319002	STAINLESS STEEL RIGHT/LEFT DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
319009	REAR COVERING PANEL FOR CABINET (L=40CM)
399530	SIDE COVERING PANEL FOR A 1-MODULE CABINET
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

INSTALLATION DIAGRAMS

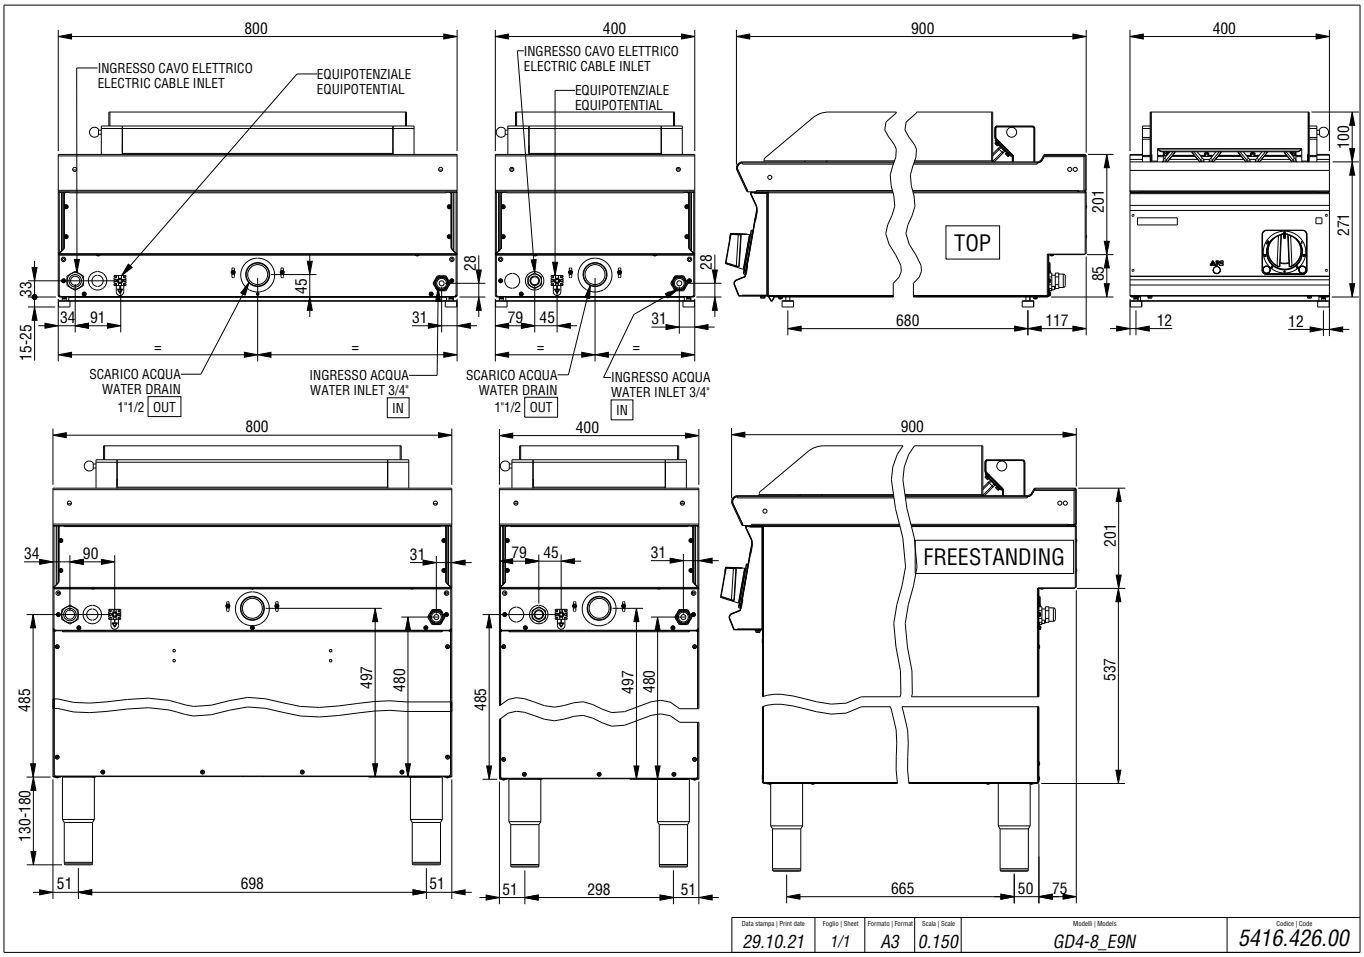

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it