
316261

FTR4E9**Electric griddle with ribbed plate
(top version)**



- Electric griddle (40 cm), top version, with a ribbed steel plate.
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- Operating thermostatic valve with temperature control ranging between 70°C and 300°C.
- Equipped with a safety thermostat that triggers in case of abnormal operation.
- Sloped cooking plate (15 mm thick) to drain grease and liquids.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Removable splashback on 3 sides and cap included.
- Technical compartment for easy connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	50÷320 °C	COOKING SURFACE	34,9X69,8 cm
PLATE TYPE	RIBBED	HEATING ZONES	n° 1
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	90 cm	HEIGHT	28 cm
PACKAGE WIDTH	100 cm	PACKAGE DEPTH	46 cm
PACKAGE HEIGHT	58 cm	NET WEIGHT	53,9 kg
GROSS WEIGHT	62,9 kg	VOLUME	0,26 m³

ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - REPLACEMENT BLADE KIT (10 PIECES)
120598	SCRAPER - REPLACEMENT BLADE KIT FOR RIBBED PLATE (10 PIECES)
319055	SIDE HEAT PROTECTION FOR GRIDDLES
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION DIAGRAMS

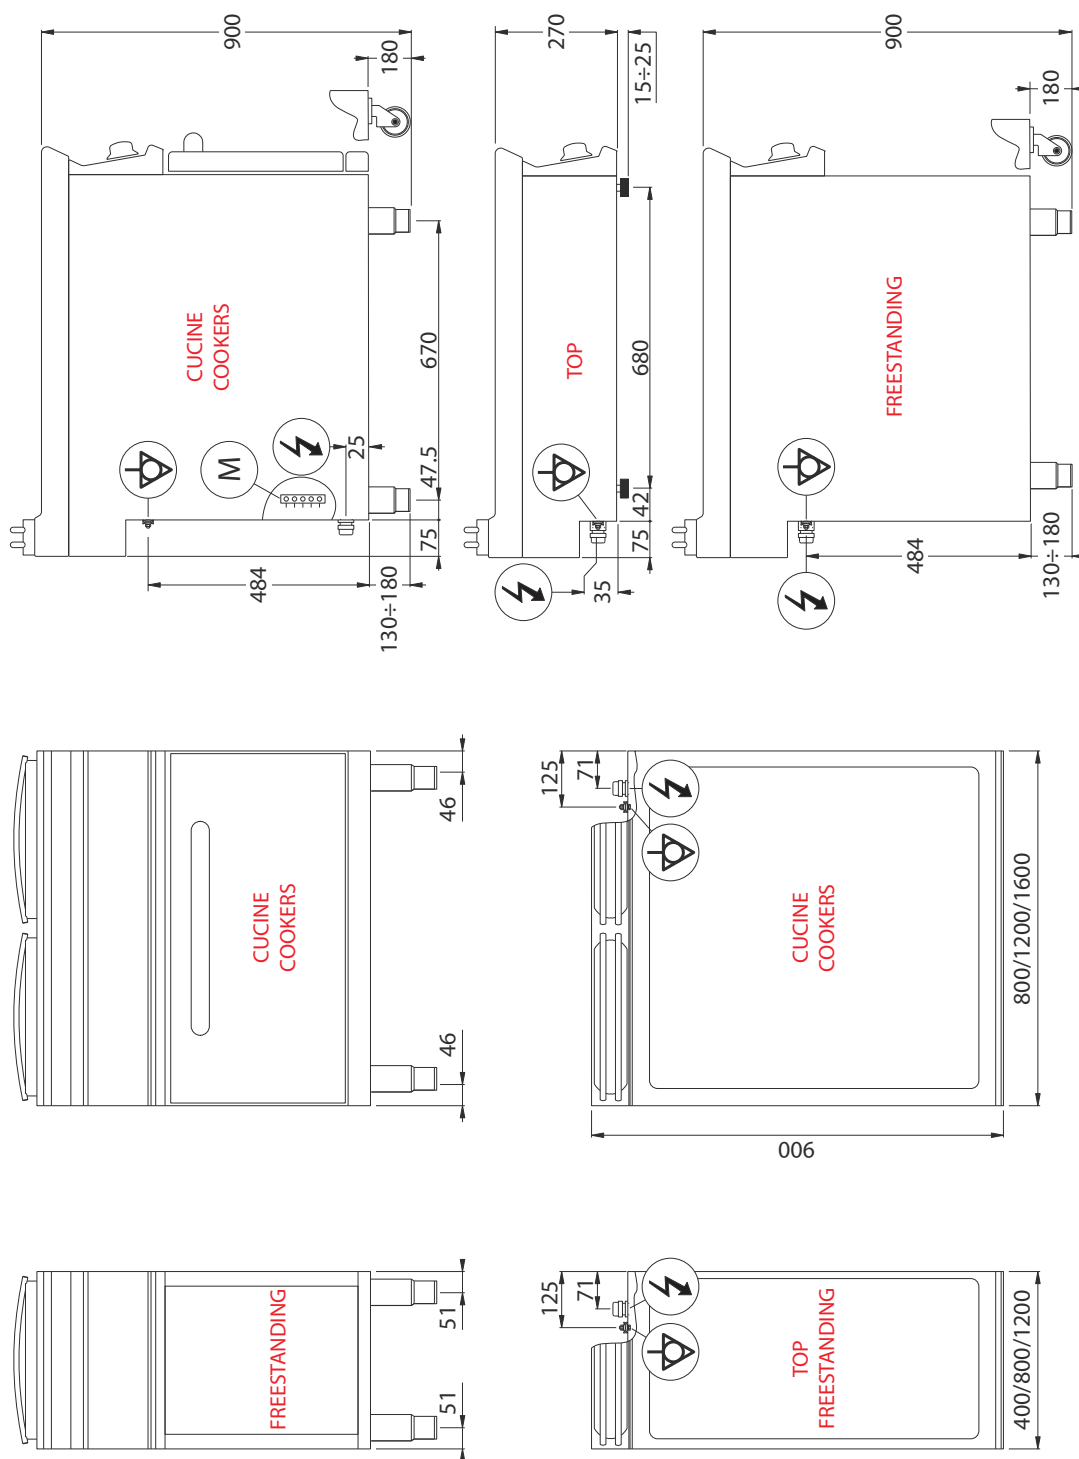


Fig.1 | Abb.1 | рис.1 - 5415.561.00