TECNO90

316563

Electric griddle with chrome-plated hot plate and electronic control (top version) with EVENHEAT technology

PRODUCT IMAGE

- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Thanks to thin, flexible elements, heat is distributed with absolute precision exactly where it is needed.
- The EVENHEAT technology, patent pending, grants a real temperature across the full plate, eliminating any cold or overheated spots
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Operating thermostatic valve with temperature control ranging between 70°C and 300°C.
- Equipped with a safety thermostat that triggers in case of abnormal operation.
- Sloped cooking plate (15 mm thick) to drain grease and liquids.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Included: removable splashback, cap and scraper.
- Technical compartment for easy connection to the electrical network.

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

TECHNICAL DATA

TOTAL POWER	18 kW	ELECTRIC POWER	18 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	60÷270 °C	COOKING SURFACE	113X69 cm
PLATE TYPE	CHROME-PLATED - SMOOTH	HEATING ZONES	n° 3
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	120 cm
DEPTH	90 cm	HEIGHT	28 cm
PACKAGE WIDTH	125 cm	PACKAGE DEPTH	99 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	175 kg
GROSS WEIGHT	190 kg	VOLUME	0,67 m³

ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - REPLACEMENT BLADE KIT (10 PIECES)
319055	SIDE HEAT PROTECTION FOR GRIDDLES
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

TECNOINOX Srl reserves the right to make changes at any time without prior notice.

INSTALLATION DIAGRAMS

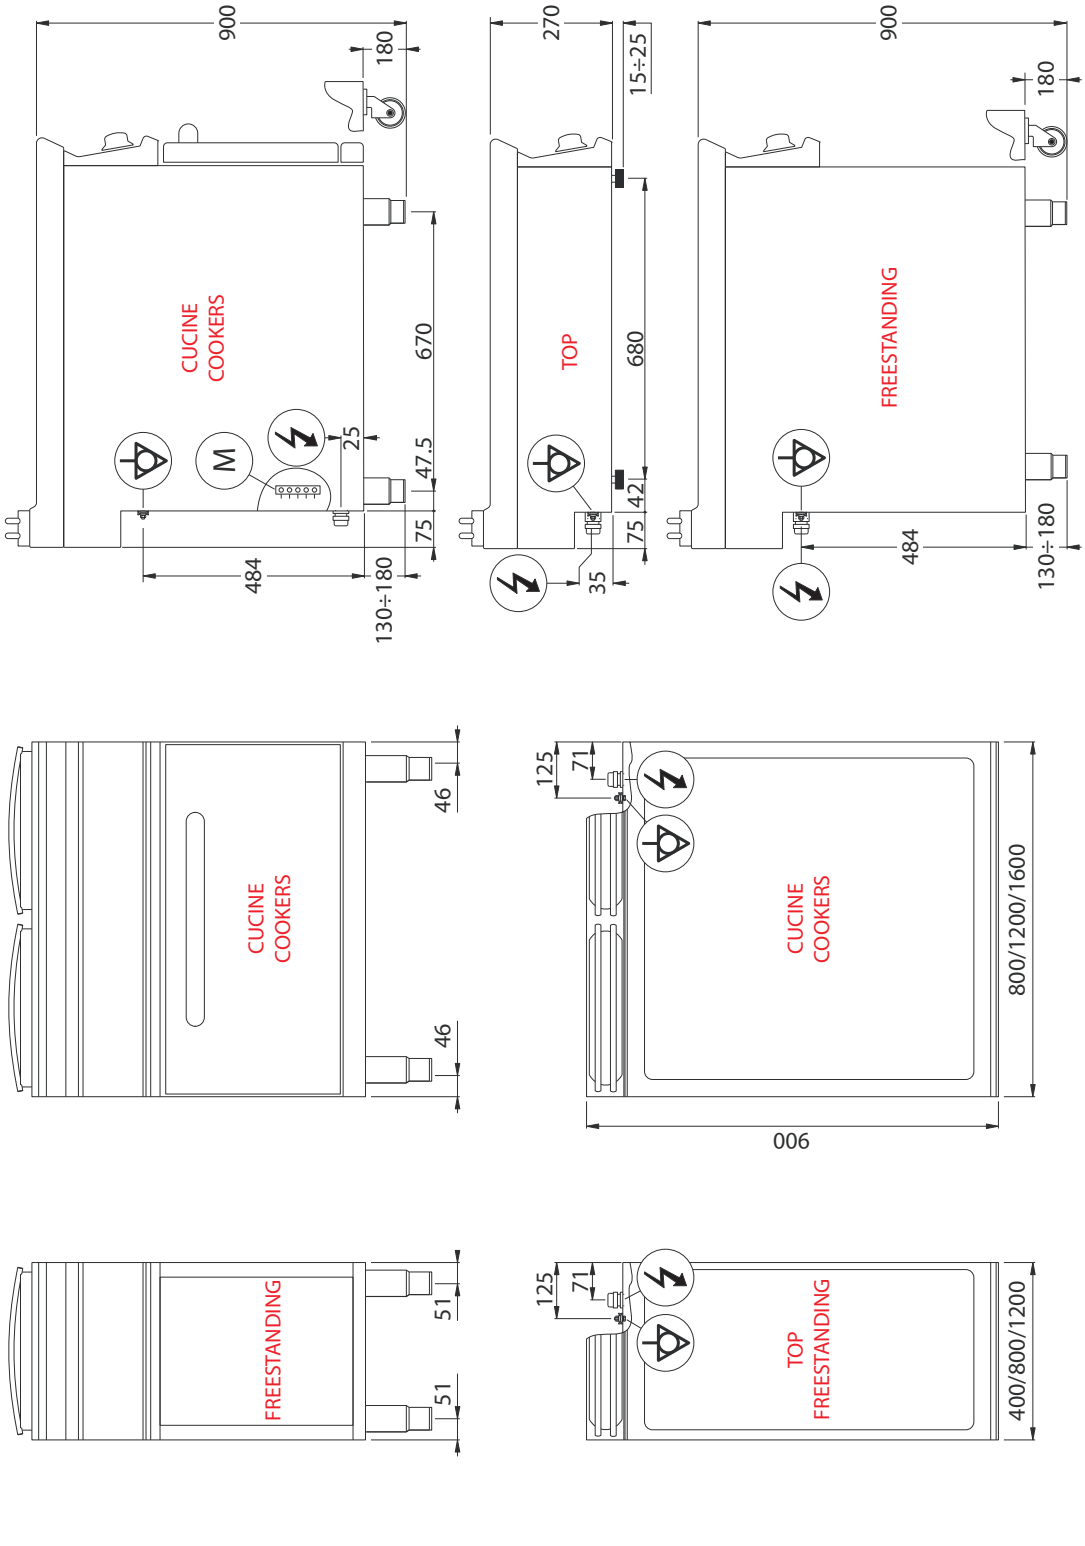


Fig.1 | Abb.1 | рис.1 - 5415.561.00