


613002**PC70G7****4-burner gas boiling top with cast iron grids (top version)**

- 4-burner gas boiling top (70 cm top version).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 and 4.5 kW) and double ring (7.2 kW).
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

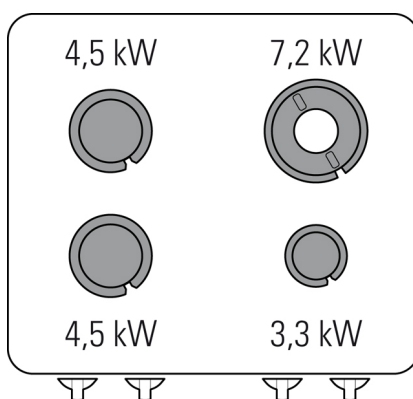

TECHNICAL DATA

TOTAL POWER	19,5 kW	GAS POWER	19,5 kW
OPEN BURNER POWER	1X7,2+1X3,3+2X4,5 n°- kW	BOILING TOP POWER	19,5 kW
NATURAL GAS CONSUMPTION	2,06 m³/h	NUMBER OF BURNERS	n° 4
BOILING PAN SUPPORT	RAAF ENAMELLED CAST IRON	CE GAS CERTIFICATE NUMBER	CE-0085B00091
GAS CONNECTION DIAMETER	1/2"G EN10226-1	FOOT HEIGHT	25 mm
FOOT ADJUSTMENT	15/25 mm	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	77 cm	PACKAGE DEPTH	81 cm
PACKAGE HEIGHT	53 cm	NET WEIGHT	41,3 kg
GROSS WEIGHT	48,7 kg	VOLUME	0,33 m³

ACCESSORIES

120655	PAN SUPPORT REDUCER
220585	JOINT
220695	COVERING PANEL FOR TOPS ON COMPARTMENTS (80MM)

INSTALLATION DIAGRAMS

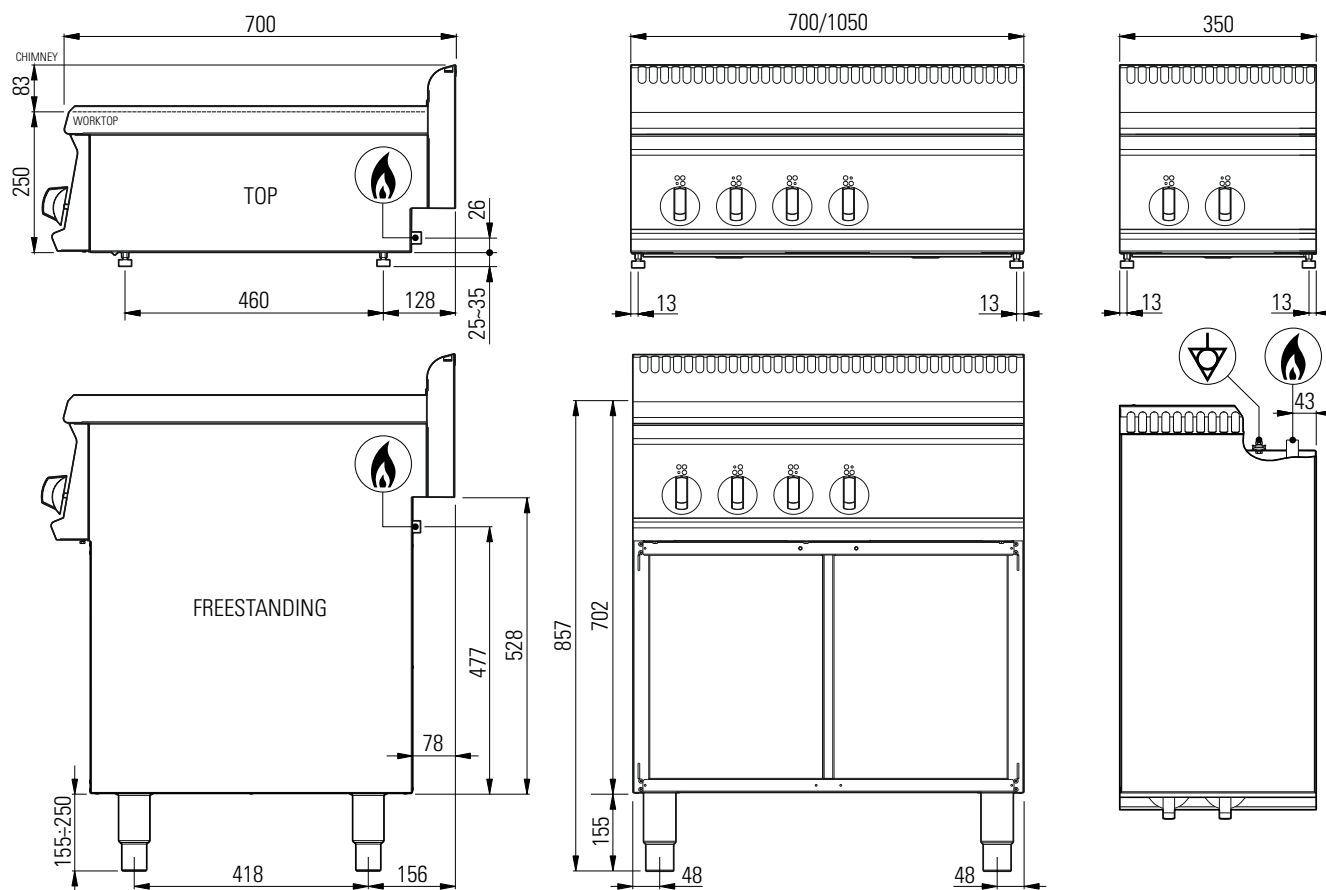


Fig.1 | Abb.1 | рис.1 - 5415.550.00