
616037**BRM35E7**

Freestanding electric multi-purpose bratt pan 15l with duplex tank bottom on open cabinet - door not applicable



- Freestanding multi-purpose electric bratt pan (15 l) on an open cabinet (35 cm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- The bratt pan is intended to braise and prepare stews, sauces, risottos, pan-fried vegetables and cooking with minimal liquid. Use as a fryer is not allowed.
- Fixed tank with rounded corners seamlessly welded to the worktop. DUPLEX tank bottom (10 mm) and AISI 304 stainless steel walls (2 mm).
- Heating through infrared heating elements placed under the tank bottom, reducing heat dispersion and allowing for faster reaching of the operating temperature.
- Thermostatic regulation 0-325°C.
- The tank is emptied by lifting the Teflon cap and the product is collected in a GN1/1 h 15 cm container inside the compartment.
- Green light indicating voltage presence.
- A safety thermostat triggers in case of abnormal operation.
- Technical compartment for easy connection to the electrical network.
- AISI 304 height-adjustable feet (133/195 mm).

TECHNICAL DATA

TOTAL POWER	4,5 kW	ELECTRIC POWER	4,5 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TEMPERATURE RANGE	50÷320 °C	TANK CAPACITY	15LT
TANK DRAIN HOLE DIAMETER	62 mm	TANK DIMENSIONS	34X51X10 cm
TANK BOTTOM THICKNESS	10 mm	DRAINING THE TANK	DRAIN IN THE TANK
TANK TYPE	AISI 304	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	70 cm
HEIGHT	85 cm	PACKAGE WIDTH	79 cm
PACKAGE DEPTH	41 cm	PACKAGE HEIGHT	53 cm
NET WEIGHT	48 kg	GROSS WEIGHT	57 kg
VOLUME	0,17 m³		

ACCESSORIES

220585	JOINT
220722	COVERING PANEL FOR FREESTANDING ELEMENTS (50MM)
619009	RIGHT/LEFT STAINLESS STEEL DOOR FOR BASES

INSTALLATION DIAGRAMS

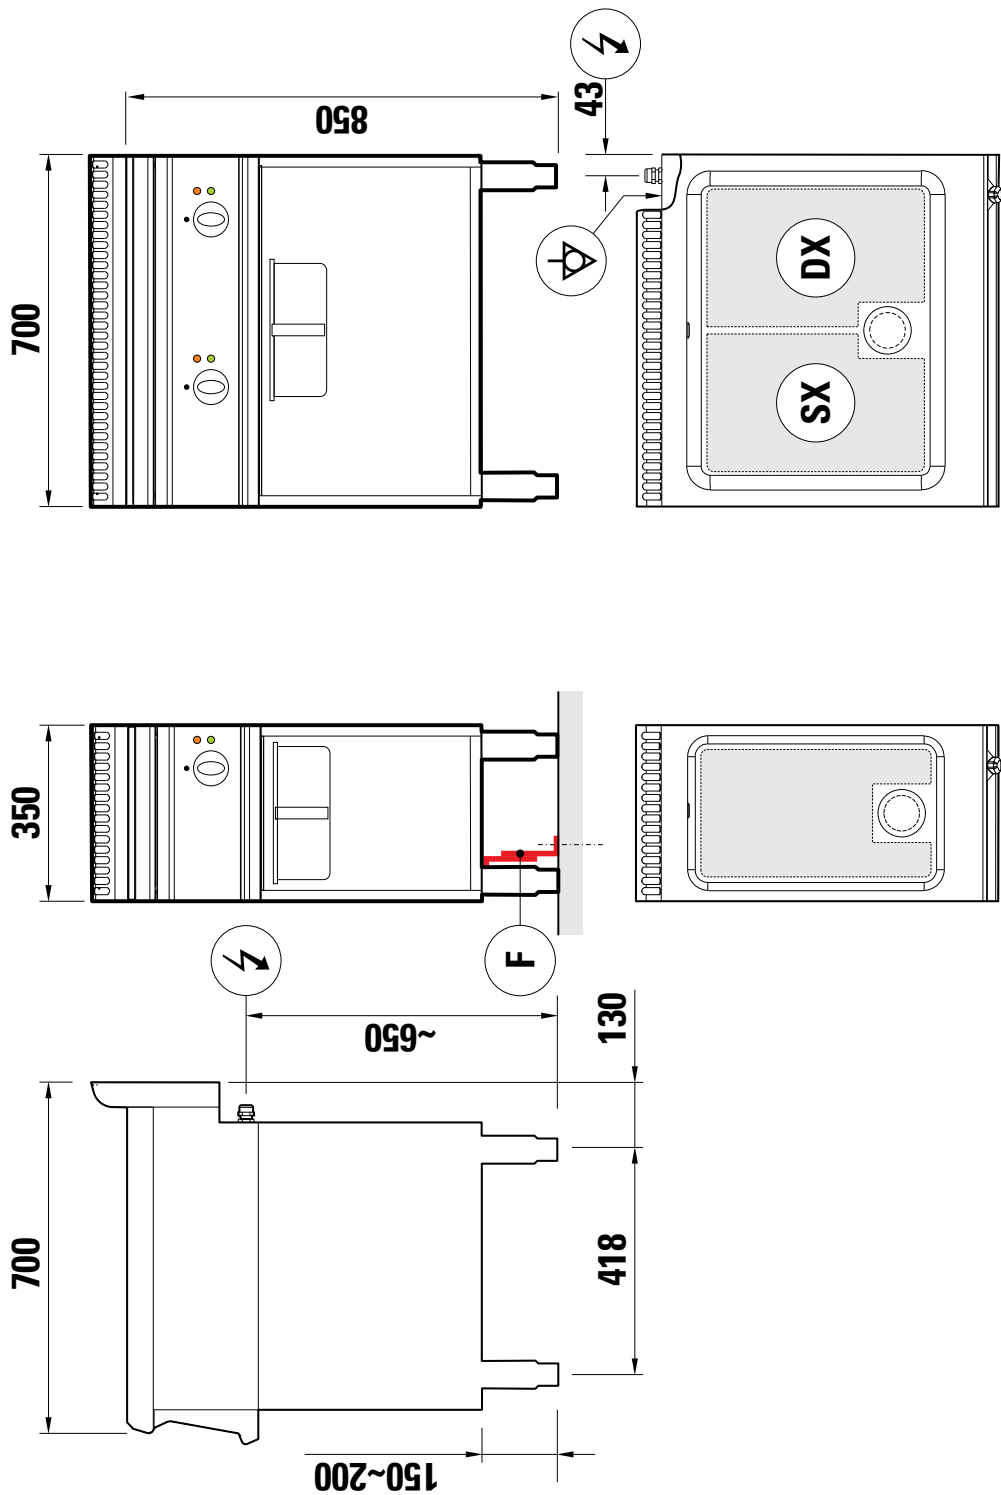


Fig.1 | Abb.1 | рис.1 - 5415.667.00

z = Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrée câble électrique | Entrada cable eléctrico.