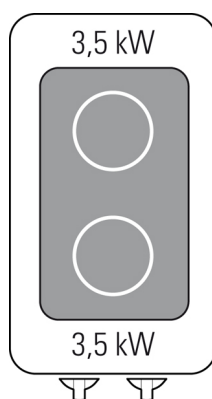

616111

PIN35E7N**2-zone induction boiling top (top version)**



- Induction cook top (35 cm top version) with 2 independent cooking zones.
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other cook top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction boiling pans with a base diameter ranging between 12 cm and 28 cm.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment for easy connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	7 kW	ELECTRIC POWER	7 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	2X3,5 n°- kW	NUMBER OF COOKING ZONES	n° 2
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	3	WIDTH	35 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	80 cm	PACKAGE DEPTH	41 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	24,1 kg
GROSS WEIGHT	28,6 kg	VOLUME	0,17 m³

ACCESSORIES

220585	JOINT
--------	-------

INSTALLATION DIAGRAMS

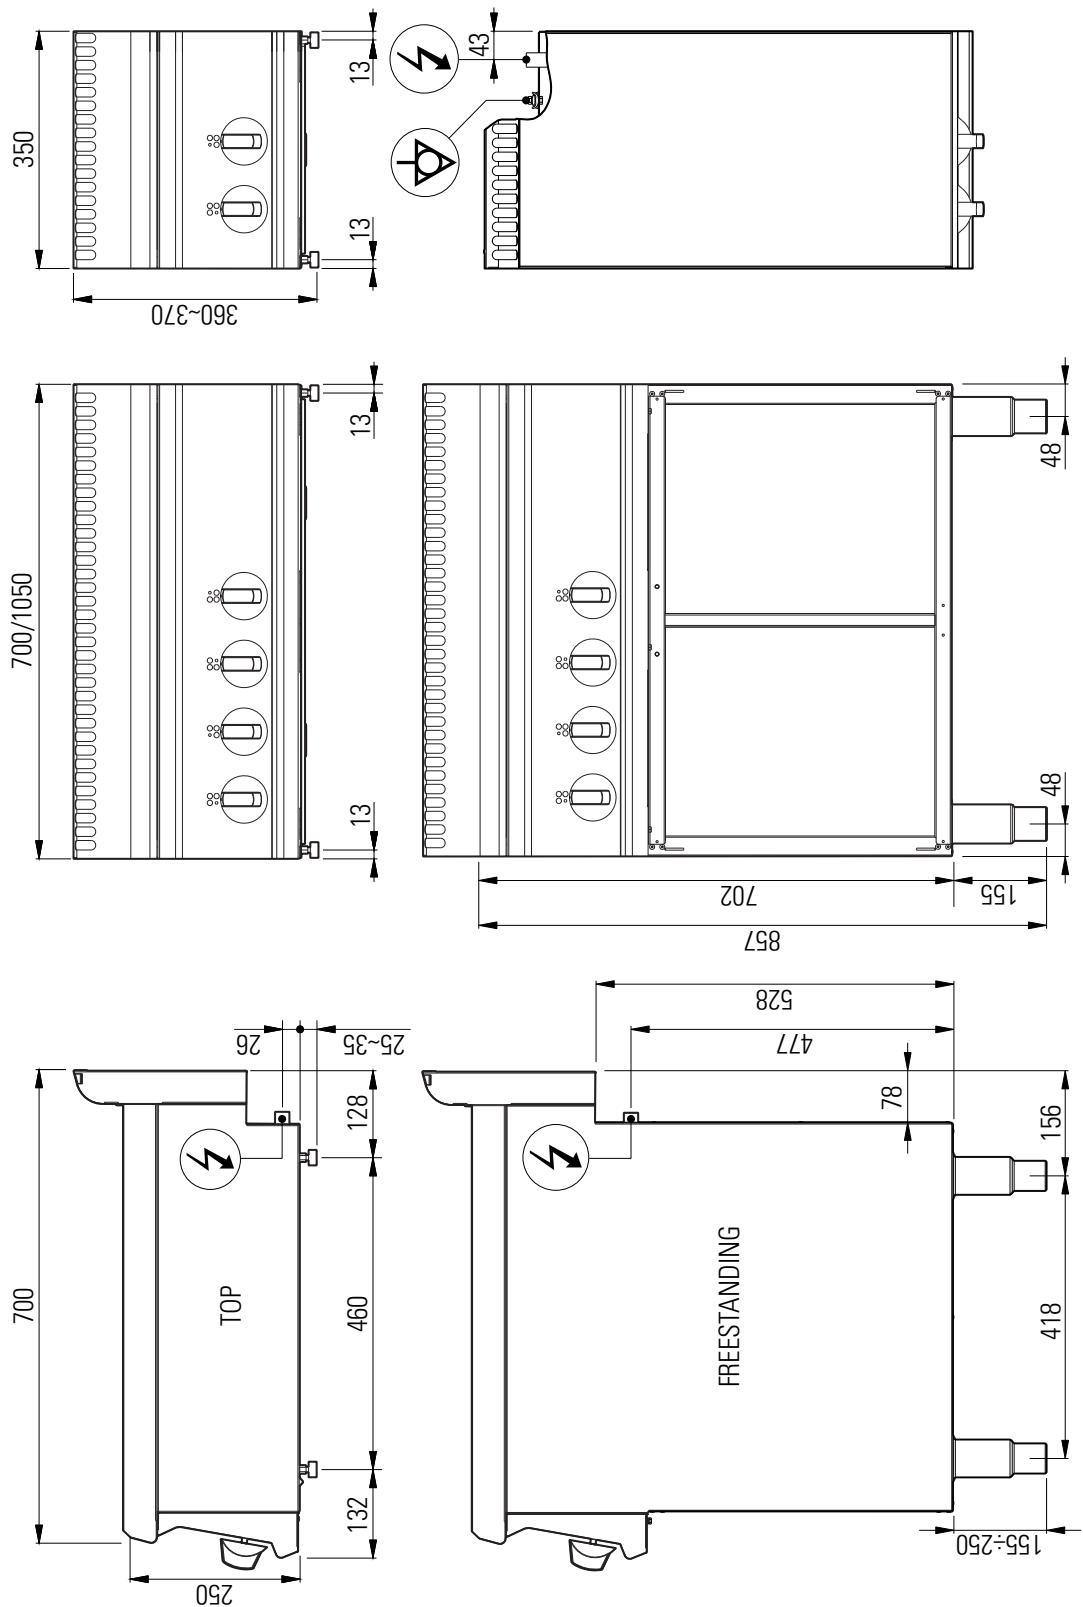


Fig.1 | Abb.1 | рис.1 - 5415.661.00