


716169**PIN8FE7N****Freestanding 4-zone induction
boiling top on open cabinet**

- Freestanding induction boiling top (80 cm) with 4 independent cooking zones on an open cabinet.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other boiling top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction cookware with a base diameter ranging between 12 cm and 28 cm.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.

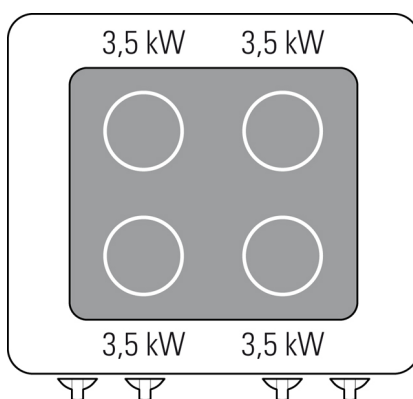

TECHNICAL DATA

TOTAL POWER	14 kW	ELECTRIC POWER	14 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	4X3,5 n°- kW	CABINET DIMENSIONS	73X57,4X39,5 cm
NUMBER OF COOKING ZONES	n° 4	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	85,0 cm
PACKAGE DEPTH	80 cm	PACKAGE HEIGHT	113 cm
NET WEIGHT	58,9 kg	GROSS WEIGHT	76,4 kg
VOLUME	0,7900 m³		

ACCESSORIES

319002	STAINLESS STEEL RIGHT/LEFT DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719005	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)
719051	RECESSED HYGIENIC H2 COMPARTMENT FOR CABINET DIM. 80CM TECNO74
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION DIAGRAMS

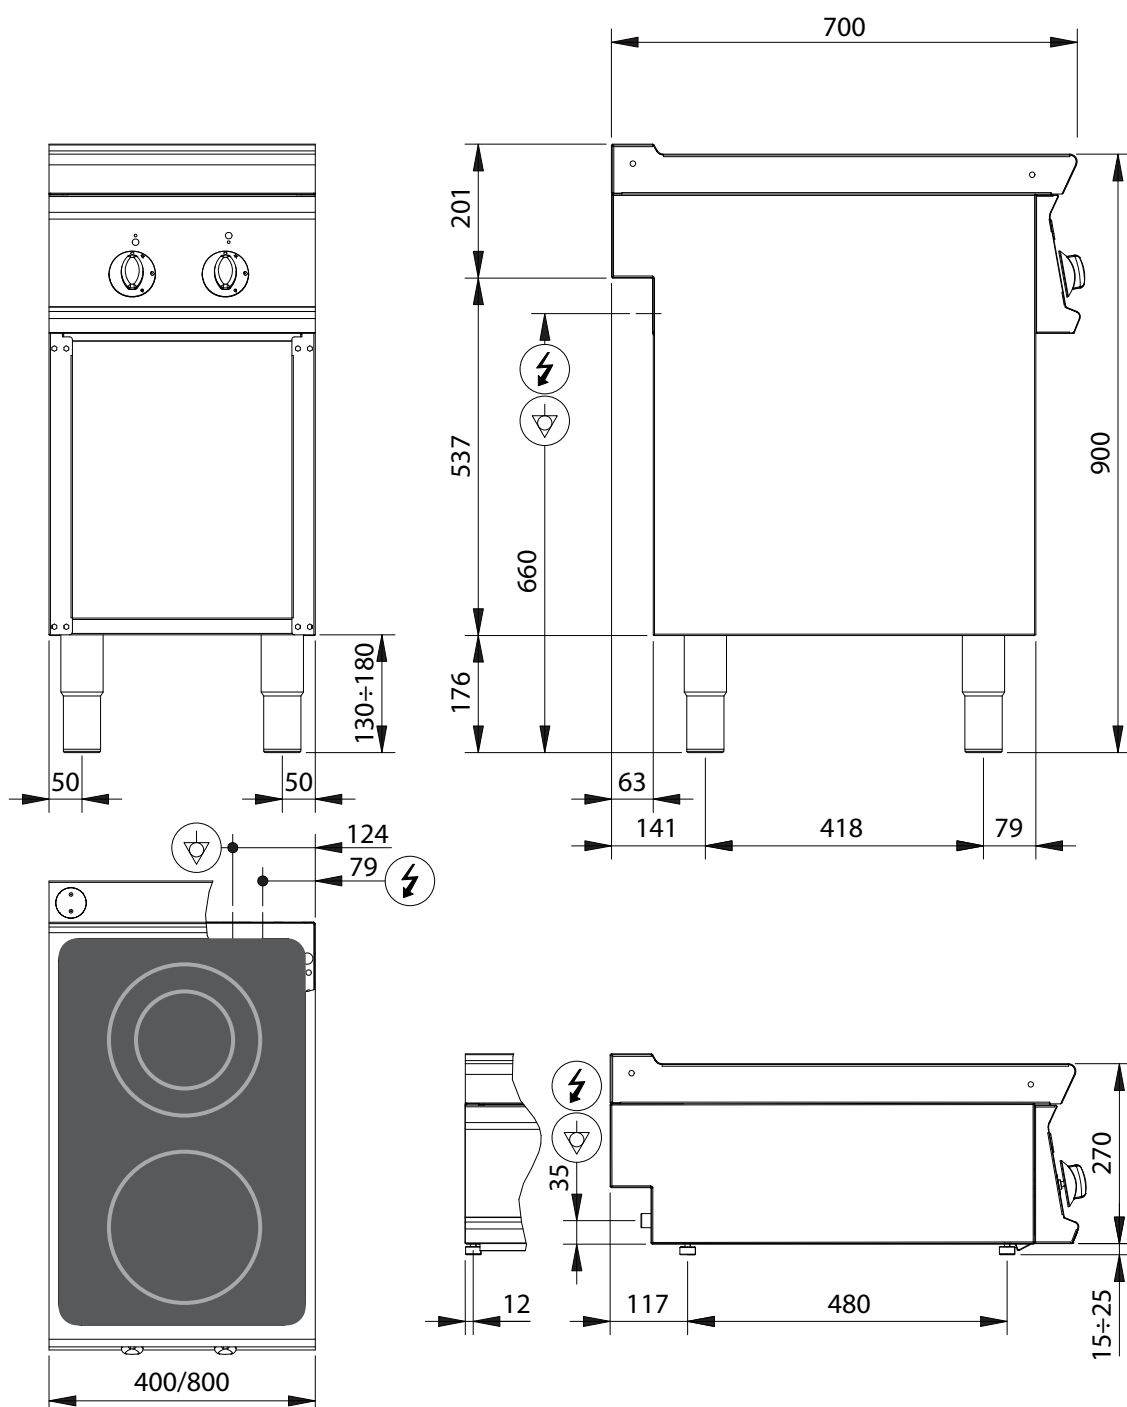


Fig.1 | Abb.1 | рис.1 - 5415.650.00