716170

GD4E7N

Electric contact Grill with water (top version)

- Electric water grill with direct cooking on heating elements (40 cm), top version.
- Power: 4.1 kW.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- AISI304 stainless steel tank seamlessly welded to the AISI 304 stainless steel top with Scotch Brite finish.
- Tilting armoured heating elements with an oval profile for direct cooking. They are made of AISI 304L stainless steel with low carbon content to ensure excellent resistance to corrosion. Moreover, they comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- Safety micro switch in the raised position of the heating elements.
- Automatic water filling with solenoid valve and reducer with a 0.1 l/min capacity.
- Water drain in the centre of the tank with 1 ½ inch pipe. Regulation of the water level in the tank through a removable and washable overflow.
- Equipped with a wire mesh filter, the overflow prevents larger food residues from obstructing the drain and makes it easier to clean the tank.
- Operating thermostat with automatic reset serving as an empty tank safety device.
- Red light on the control panel indicating empty tank.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.
- Energy regulator 0-6-INFINITE which simultaneously activates the heating element and tank water filling. Maximum temperature 400°C.
- Removable splashback on 3 sides included.
- A stainless steel scraper shaped is included as per standard. It is shaped as the heating element profile to facilitate cleaning, and it can also be used to lift the heating element unit.
- Plastic elbow fitting for rear draining, designed for high-temperature use, included.
- The electric components, such as solenoid valves and contactors, are positioned near the control panel to facilitate maintenance.
- Technical compartment for easy connection to the electrical network.
- Energy regulator 0-6-INFINITE which simultaneously activates the heating element and tank water filling. Maximum temperature 300°C.

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

TECHNICAL DATA

TOTAL POWER	4,1 kW	ELECTRIC POWER	4,1 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
COOKING SURFACE	26,8X44,7 cm	HEATING ZONES	n° 1
WATER CONNECTION POSITION	4,7CM	WATER DRAIN POSITION	6CM
WATER CONNECTION DIAMETER	3/4"	DRAIN DIAMETER	1" 1/2
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	54,0 cm	NET WEIGHT	40 kg
GROSS WEIGHT	46 kg	VOLUME	0,19 m³

ACCESSORIES

719040	SIDE HEAT PROTECTION DEVICE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

INSTALLATION DIAGRAMS

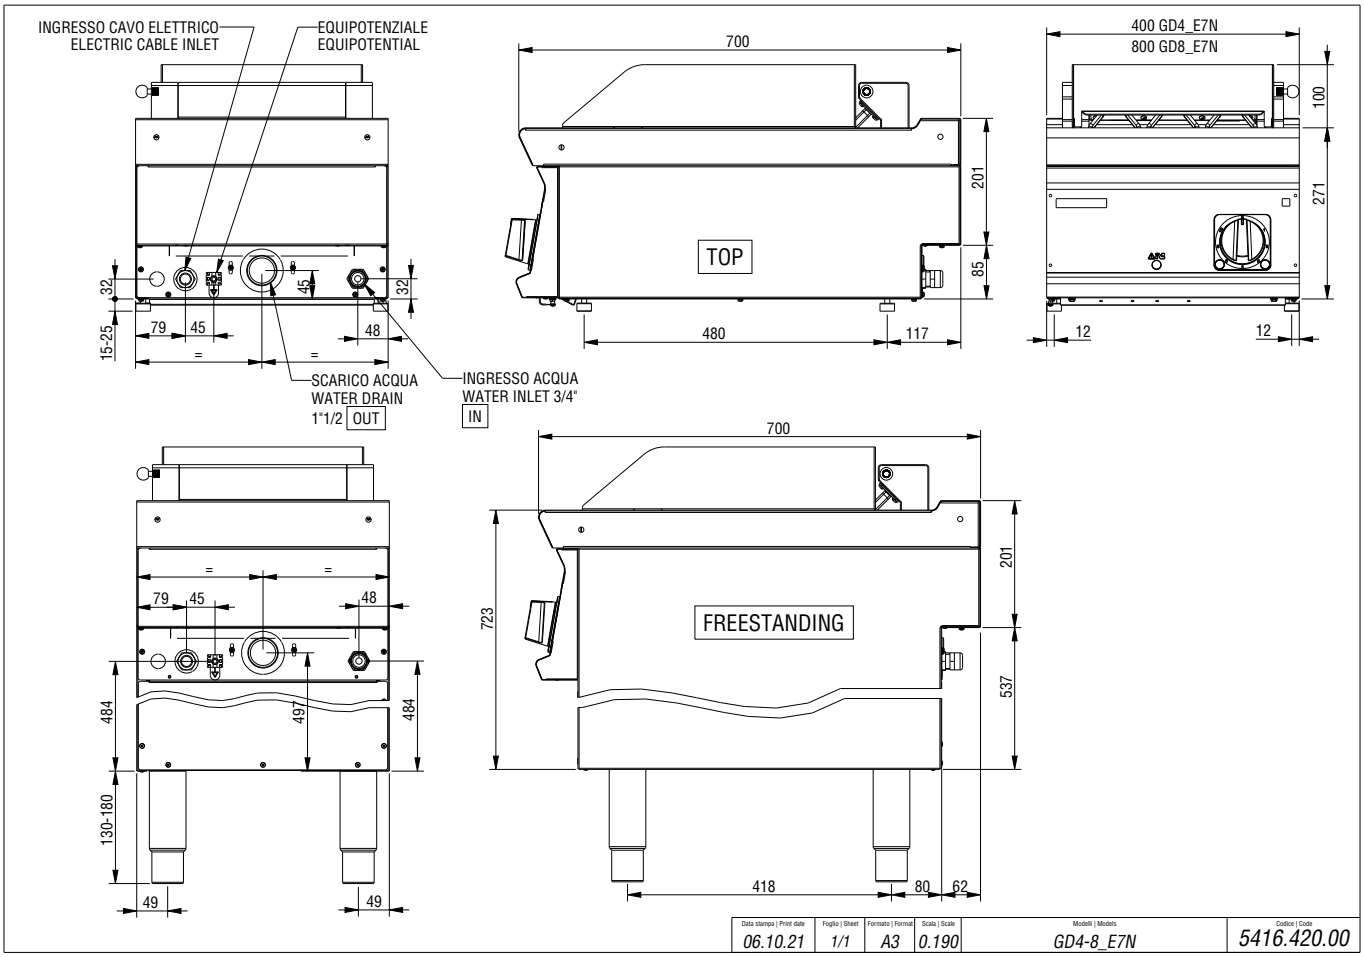

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it