954660

EOM20TSL

Tecnocombi NEXT electric combi steamer with 20 trays GN1/1, touch screen, programmable recipes, automatic washing and direct steam - with GN1/1 trays rack trolley - compatible with pastry 16 trays (600x400)mm rack trolley

- 20-tray GN 1/1 electric combi steamer, Touch control screen, with direct steam.
- Tray-rack trolley included, compatible with a 16-trays pastry trolley.
- Cooking chamber made of AISI 304 stainless steel (1 mm thick) featuring rounded corners to prevent dirt buildups. The polished steel finish improves heat refraction, reduces steel roughness, and prevents corrosion from chemicals, allowing easy removal of food residues.
- AISI 304 watertight door with high-performance and easily replaceable gasket and 2 glass panes: the outer pane is 4 mm thick and the inner pane is 6 mm thick with a thermal reflective treatment for enhanced energy efficiency. Air tunnel in the door for operator safety.
- Anti-slip and anti-fingerprint handle with right/left opening.
- The interface is as user-friendly as a smartphone, thanks to a 7-inch capacitive touch display.
- The cooking parameters are easily visible at a glance, thanks to the automatic distance display mode.
- The 8 cooking cycles help save energy and obtain excellent results.
- The professional fans are governed by an inverter, work with 4 speeds and stop instantly when rotation is reversed and the door is opened.
- In the mixed cycle you can manage up to 19 humidity levels at 5% intervals from 0% to 90%.
- Programmable steam puff up to 20 seconds, enhancing humidity levels in the cooking chamber during convection mode.
- Up to 300 cooking programs, including both uploaded and chef-created ones.
- Multifood technology for cooking several foods simultaneously.
- Automatic self-cleaning including 4 cycles, with the longest lasting only 62 minutes.
- Multipoint core probe with 4 detection points included.
- Cloud platform for controlling recipes and ovens easily.
- HACCP and consumption data recording.

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

TECHNICAL DATA

TOTAL POWER	41 kW	ELECTRIC POWER	41 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
MOTOR FAN ELECTRIC POWER	1 kW	CONVECTION UNIT POWER	40 kW
TRAY CAPACITY	n° 20XGN1/1	MAXIMUM FOOD LOAD	80 Kg
COOKING CHAMBER DIMENSIONS	68X45X148 cm	GUIDES	n° 20
VERTICAL DISTANCE BETWEEN TRAYS	6,5 cm	THERMAL INSULATION THICKNESS	35 mm
STEAM CYCLE TEMPERATURE	50÷120 °C	MIXED CYCLE TEMPERATURE	50÷250 °C
CONVECTION CYCLE TEMPERATURE	50÷265 °C	TIMER	0-540 min
OVEN TYPE	DIGITAL - GN1/1 TRAY	FAN SPEED	4
WATER CONNECTION POSITION	22CM	WATER DRAIN POSITION	18CM
WATER CONNECTION DIAMETER	3/4"	DRAIN DIAMETER	1,9685"
FOOT HEIGHT	220 mm	FOOT ADJUSTMENT	220/246 mm
IPX RATING	4	WIDTH	100 cm
DEPTH	94 cm	HEIGHT	188 cm
PACKAGE WIDTH	108 cm	PACKAGE DEPTH	110 cm
PACKAGE HEIGHT	208 cm	NET WEIGHT	256 kg
GROSS WEIGHT	300 kg	VOLUME	2,47 m³

ACCESSORIES

9032	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=20MM
9033	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=40MM
9034	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=65MM
9055	GN1/1 STAINLESS STEEL BAKING GRID
9056	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=20MM
9057	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=40MM
9058	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=65MM
9059	GN1/1 ENAMELLED BACKING TRAY H=20MM
9060	GN1/1 ENAMELLED BACKING TRAY H=40MM
9061	GN1/1 ENAMELLED BACKING TRAY H=65MM
951912	EXTERNAL SPRAY GUN
951915	ALKALINE DETERGENT TANK (10LT) FOR OVENS
951917	ALUMINIUM TRAY WITH HEAT RETENTION FOR PIZZA (GN1/1)
951933	ALUMINIUM SMOOTH TEFLON COATED TRAY WITH HEAT RETENTION
951934	ALUMINIUM RIBBED TEFLON COATED TRAY WITH HEAT RETENTION
951942	20-TRAY RACK TROLLEY GN1/1
951953	TEFLON COATED ALUMINIUM TRAY GN1/1
951954	PERFORATED TEFLON COATED ALUMINIUM TRAY GN1/1
951990	TROLLEY LEVELLING RAMP FOR 16/20-TRAY OVENS (OVENS VERSION 07/2022)
951997	TROLLEY LEVELLING RAMP FOR 16/20-TRAY OVENS
961942	16-TRAY RACK TROLLEY (600X400MM)

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

INSTALLATION DIAGRAMS

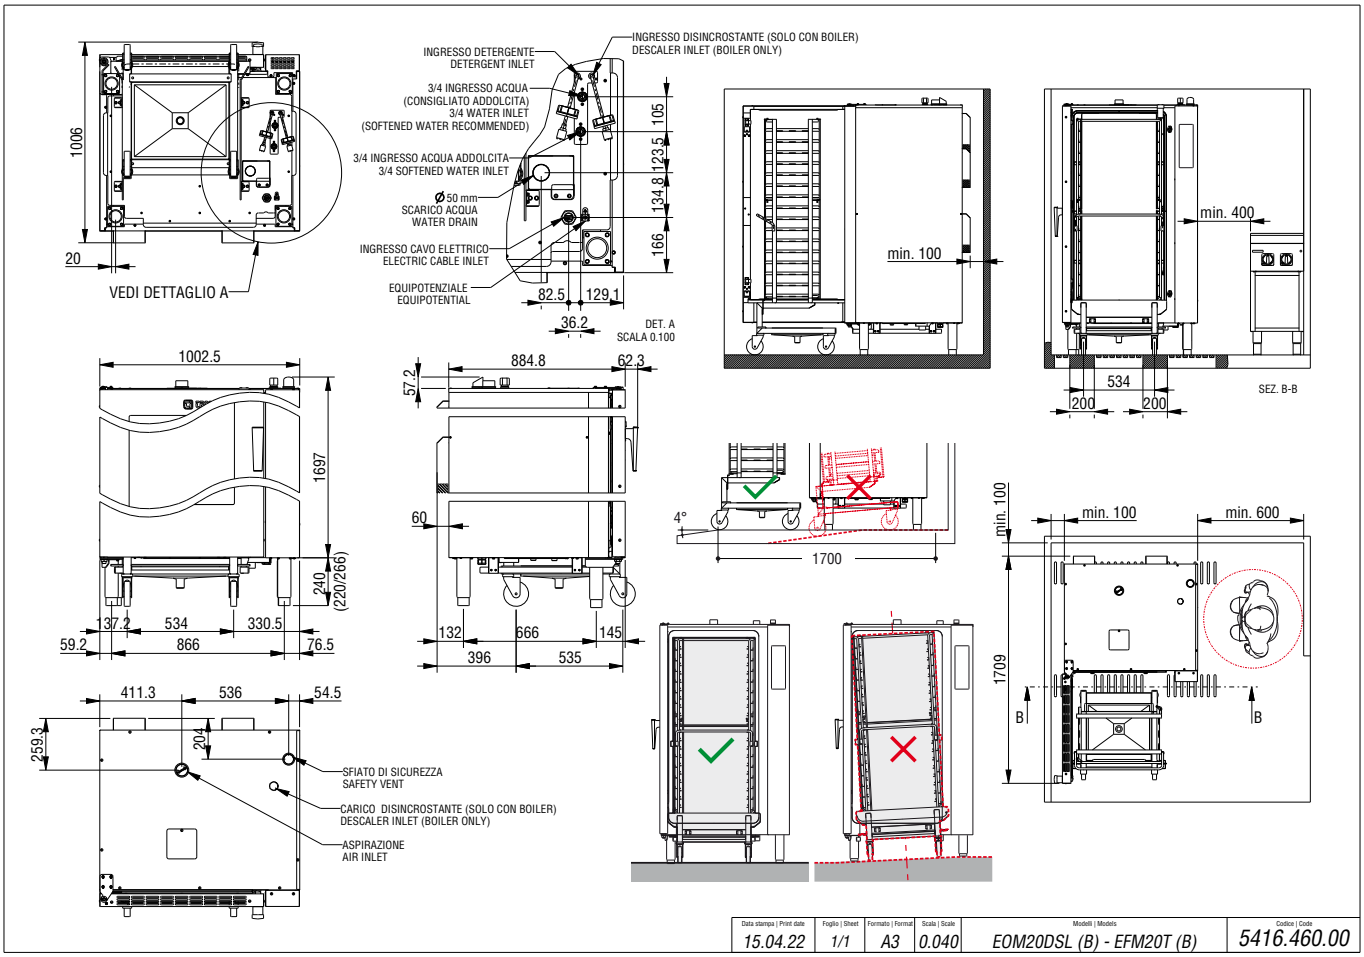

TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it