
126038

BM35E/0**GN1/1 electric Bainmarie (top version)**



- Electric bain-marie GN1/1, (35 cm top version).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Bain-marie maintains food temperature and melts delicate solid food, such as chocolate, butter, and lard.
- AISI 304 stainless steel deep drawn tank with rounded corners sealed to the AISI 304 stainless steel top with Scotch Brite finish.
- Heating through Incoloy armoured heating elements outside the tank.
- Thermostatic control 0-30-60-90°C.
- Safety thermostat to protect the tank against ignition without water or excessive evaporation.
- Manual water filling.
- Front drain with elbow extension included.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment to facilitate connection to the electrical network.


TECHNICAL DATA

TOTAL POWER	1,3 kW	ELECTRIC POWER	1,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	230 ~ V
TEMPERATURE RANGE	0÷90 °C	TANK CAPACITY	GN1/1
TANK DIMENSIONS	30,5X51X16,5 cm	TANK TYPE	AISI 304
FOOT HEIGHT	25 mm	FOOT ADJUSTMENT	25/35 mm
IPX RATING	4	WIDTH	35 cm
DEPTH	65 cm	HEIGHT	28 cm
PACKAGE WIDTH	71 cm	PACKAGE DEPTH	41 cm
PACKAGE HEIGHT	53 cm	NET WEIGHT	12 kg
GROSS WEIGHT	17 kg	VOLUME	0,15 m³

ACCESSORIES

120580	BAINMARIE FALSE BOTTOM (GN1/1)
120585	JOINT FOR TECNO60, TECNO65
120650	LID (GN1/1)

INSTALLATION DIAGRAMS

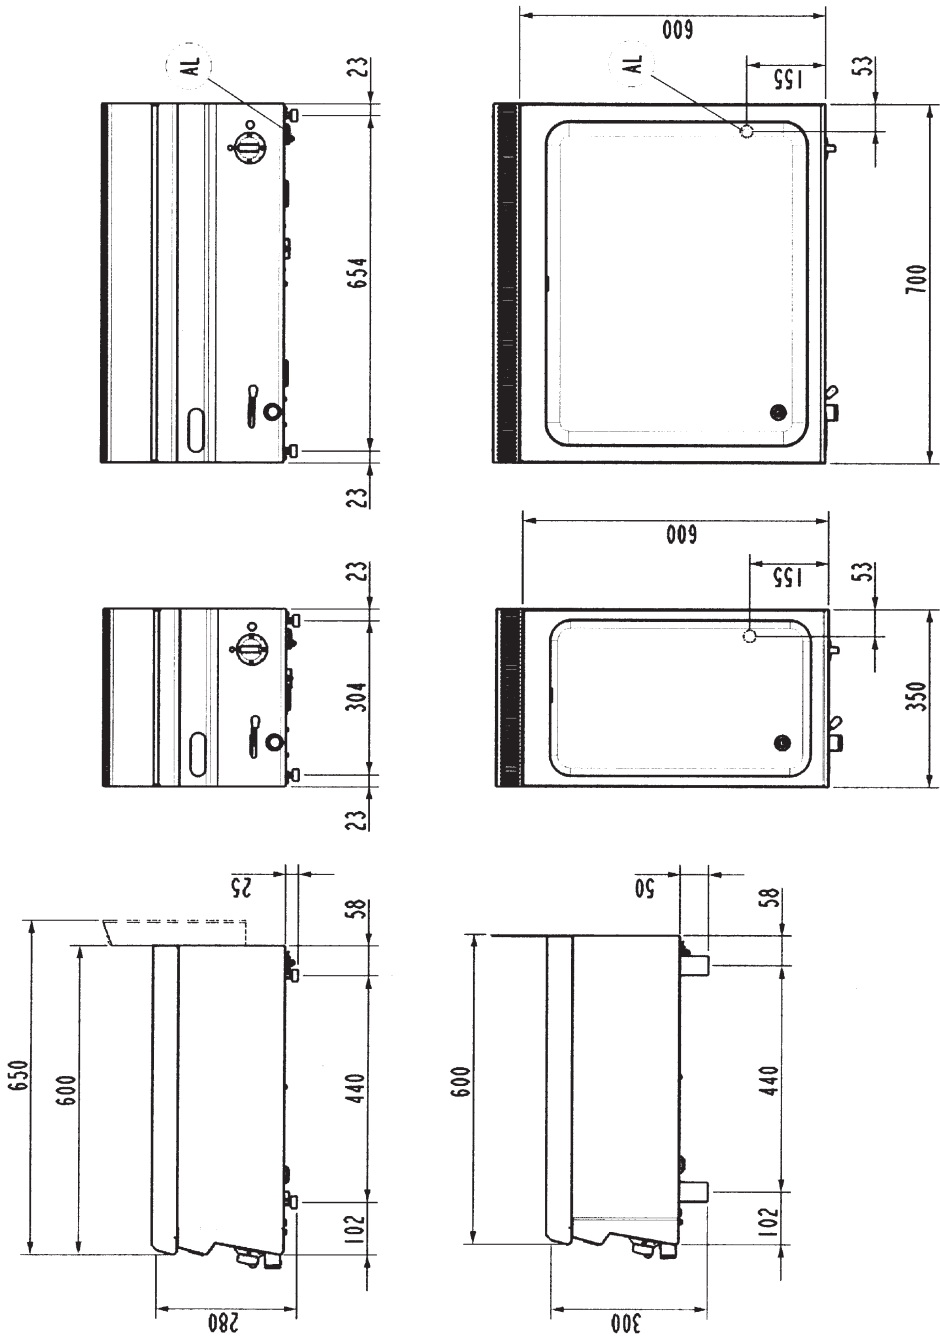

Al = Entrada cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrée cable électrique | Entrada cable eléctrico.

Fig.1 | Abb.1 | рис.1 - 5415.685.00