# 313266

## PCH4HPFG9

## 2-burner hermetic gas boiling top High Power with cast iron grids freestanding on open cabinet




- Freestanding 2-burner gas boiling top on an open cabinet (40 cm), HIGH POWER version.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring (10kW) and double ring (11kW).
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.


TECNOINOX Srl reserves the right to make changes at any time without prior notice.
tecnoinox.it

## TECHNICAL DATA

| | | | |
|---|---|---|---|
| TOTAL POWER | 21 kW | GAS POWER | 21 kW |
| OPEN BURNER POWER | 1X10 + 1X11 n°- kW | BOILING TOP POWER | 21 kW |
| NATURAL GAS CONSUMPTION | 2,22 m³/h | CABINET DIMENSIONS | 33X76,1X39,5 cm |
| NUMBER OF BURNERS | n° 2 | BOILING PAN SUPPORT | RAAF ENAMELLED CAST IRON |
| CE GAS CERTIFICATE NUMBER | CE-0085BQ0326 | GAS CONNECTION DIAMETER | 1/2"G EN10226-1 |
| FOOT HEIGHT | 133 mm | FOOT ADJUSTMENT | 133/195 mm |
| WIDTH | 40 cm | DEPTH | 90 cm |
| HEIGHT | 90 cm | PACKAGE WIDTH | 100,0 cm |
| PACKAGE DEPTH | 46,0 cm | PACKAGE HEIGHT | 115,0 cm |
| NET WEIGHT | 52,0000 kg | GROSS WEIGHT | 64,4 kg |
| VOLUME | 0,5300 m³ | | |
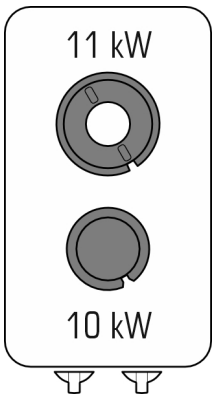
## ACCESSORIES

| | |
|---|---|
| **319002** | STAINLESS STEEL RIGHT/LEFT DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90 |
| **319009** | REAR COVERING PANEL FOR CABINET (L=40CM) |
| **319067** | 10KW HERMETIC FLAME SPREADER |
| **399516** | ADJUSTABLE WATER TAP |
| **399530** | SIDE COVERING PANEL FOR A 1-MODULE CABINET |
| **399538** | PAN SUPPORT REDUCER |
| **399573** | PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM) |


TECNOINOX Srl reserves the right to make changes at any time without prior notice.
**tecnoinox.it**

## INSTALLATION DIAGRAMS

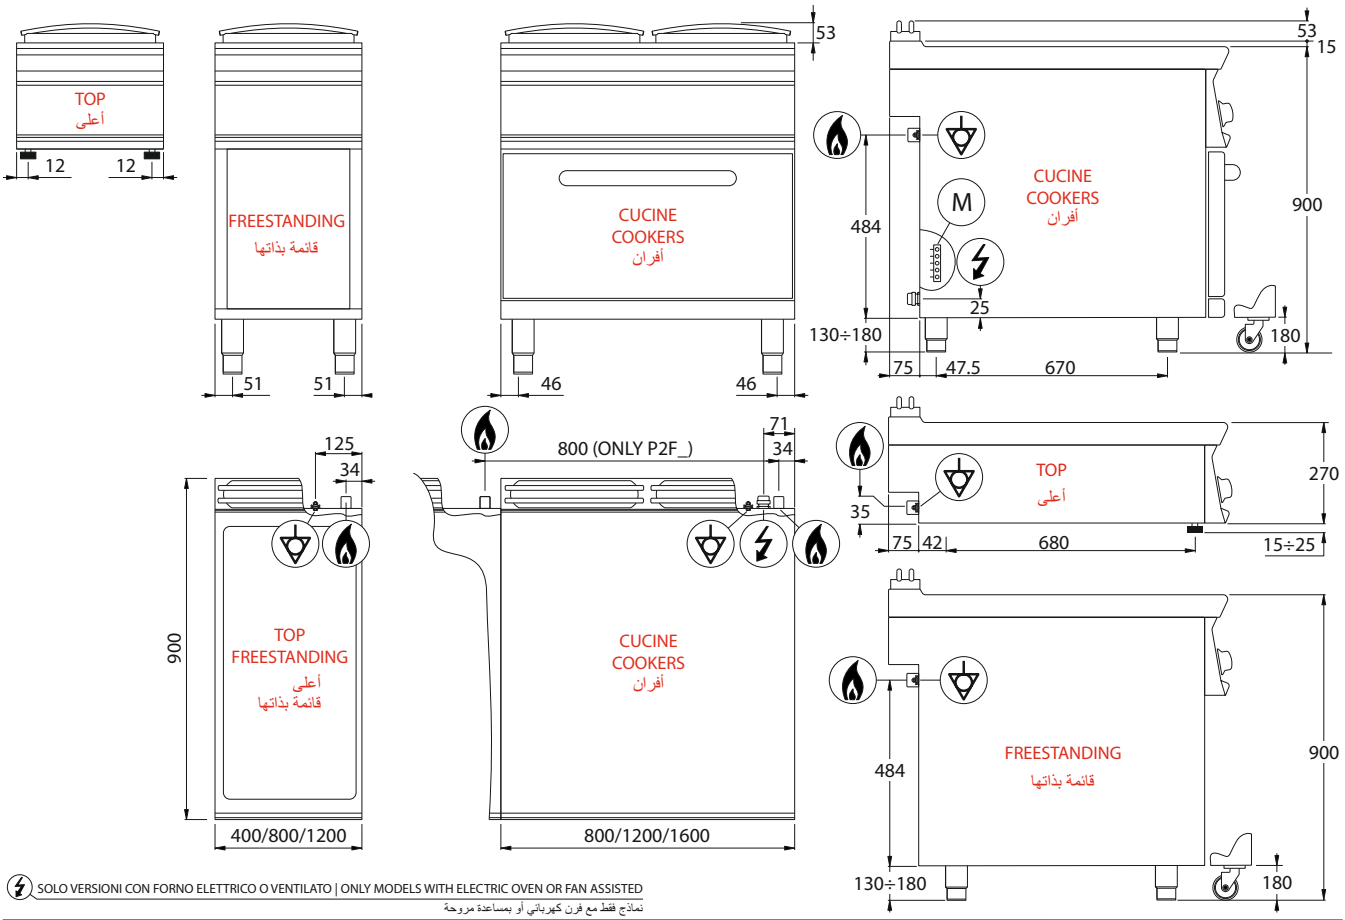


Fig.1 | Abb.1 | рис.1 | | الصورة رق ١ - 5415.618.00