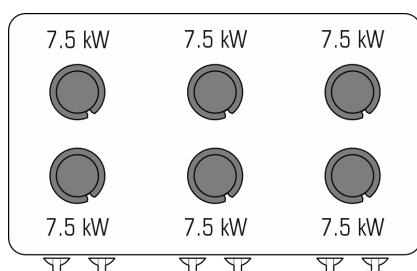

713203

6-burner hermetic gas boiling top with cast iron grid (top version)



- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



TECHNICAL DATA

TOTAL POWER	45 kW	GAS POWER	45 kW
OPEN BURNER POWER	6X7,5 n°- kW	BOILING TOP POWER	45 kW
NATURAL GAS CONSUMPTION	4,76 m³/h	NUMBER OF BURNERS	n° 6
BOILING PAN SUPPORT	RAAF ENAMELLED CAST IRON	CE GAS CERTIFICATE NUMBER	CE-0085B00091
GAS CONNECTION DIAMETER	3/4"G EN10226-1	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	127 cm	PACKAGE DEPTH	81 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	79,1 kg
GROSS WEIGHT	89,6 kg	VOLUME	0,55 m³

ACCESSORIES

319068	HERMETIC FLAME SPREADER (5 - 6 - 7,5 KW)
399516	ADJUSTABLE WATER TAP
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION DIAGRAMS

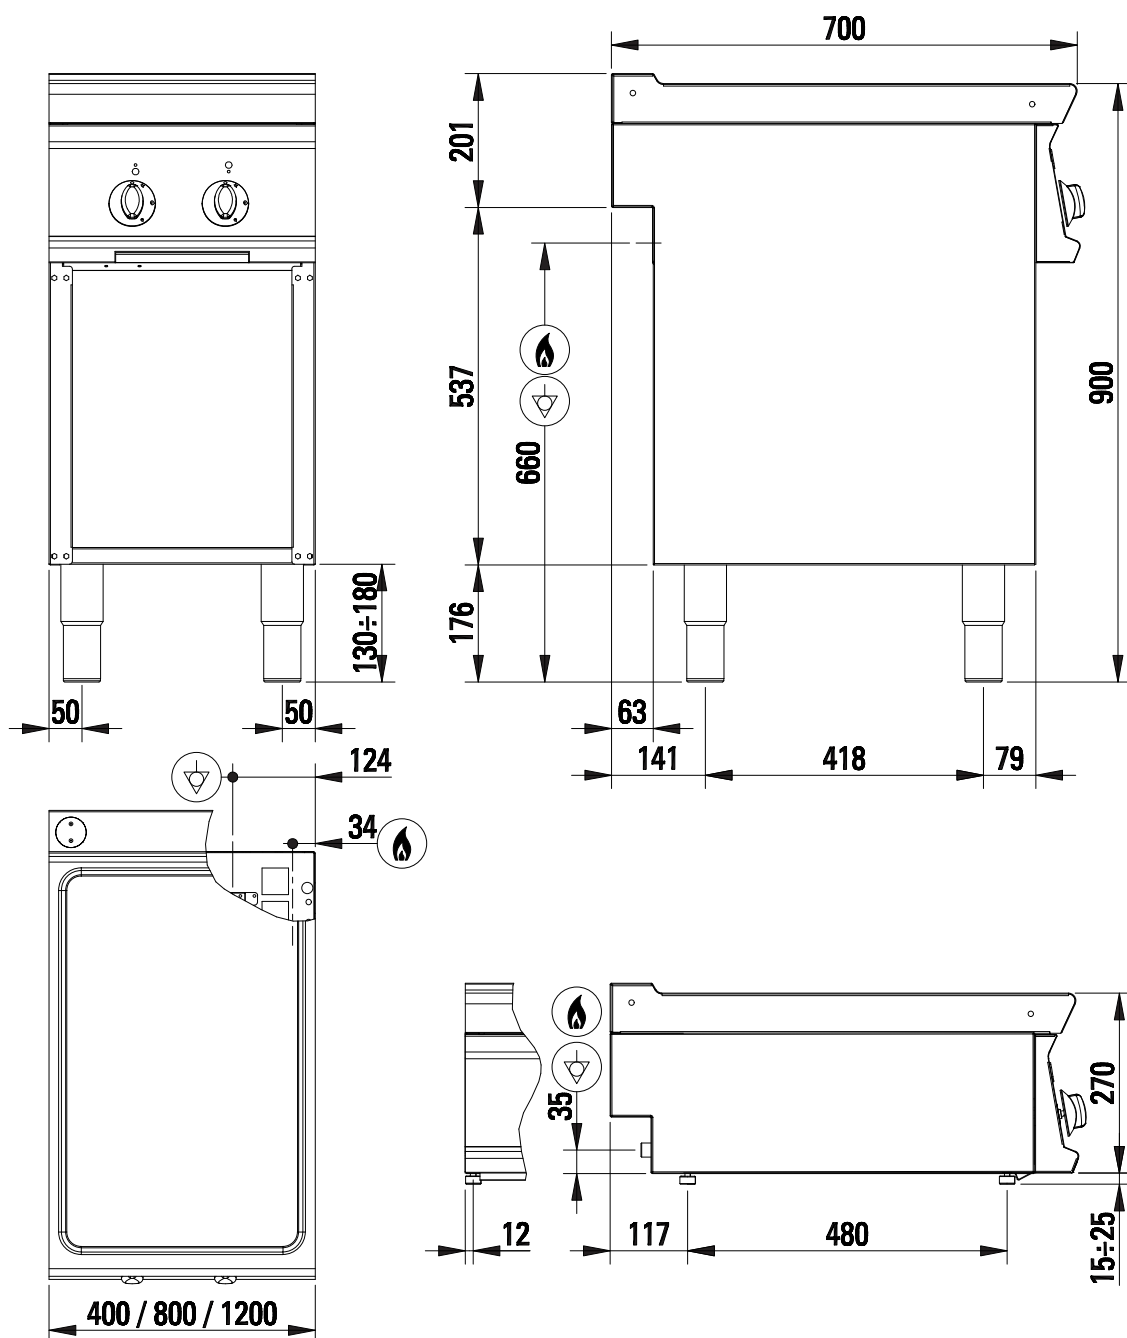


Fig.1 | Abb.1 | рис.1 - 5415.649.00